

Mats for Professional Use

Ergonomic Anti-Fatigue and Safety Matting



Index and Guide

Notrax® Product Testing	3
Notrax® Matting Pictograms	3
Notrax® Mats for Professional Use	6
Benefits of Anti-Fatigue Matting	8

Art	Product	Page
-----	---------	------

Workplace Solutions for Dry Areas

782	Sky Trax®	12
479	Cushion Trax®	14
489	Cushion Flex™	16
406	Crossrib Sof-Tred™	19
413	Gripper Sof-Tred™	19
417	Bubble Sof-Tred™	19
419	Diamond Sof-Tred™	19
408	Airug® Plus	21
409	Sof-Tred Plus™	21
410	Airug®	21
411	Sof-Tred™	21
649	Safety Stance Solid™	22
546	Diamond Flex™ Series	24
556	Cushion Ease Solid™ Series	26
570	De-Flex™ Series	28
460	SkywalkerHD™ Series	30
460	SkywalkerHD™ Accessories	32
426	Posture Mat™	35
425	Posture Mat Classic™	35
450	Skywalker® PUR Series	38
455	Skystep™ Series	40
526G	Sani-Flex™	40

Workplace Solutions for Wet Areas

549	Safety Stance™	44
550	Cushion Ease™ Series	46
563	Sanitop Deluxe™	49
562	Sanitop™	49
567	Superflow® XT Nitrile	49
T23	Multi Mat II®	49
537	Flexdek™	51
539	Gripwalker™	51
620	Diamond Flex Lok™	53
620	Diamond Flex Lok™ Solid	53

Art	Product	Page
-----	---------	------

Electrostatic Discharge (ESD) Solutions

826	Diamond Stat™	57
825	Cushion Stat™	57
828	High Tech POP™ 3 Layer	59
829	Anti-Stat POP™ 3 Layer	59
827	Anti-Stat POP™	59
	ESD Accessories	60
754	Rib 'n' Roll™ ESD 3 mm fine rib	61
743	Conductive Runner™	61

Industrial Specialties

832	Switchboard Matting™ Series	65
979	Saddle Trax®	67
580	Sorb Stance™	69
585	Eco Stance™	69
040	Slabmat Carre™	71
045	Slabmat™	71

Rubber Runners & Liners

Food Processing & Food Service Matting Solutions

526	Sani-Flex™	79
550RD	Cushion Ease™ Red	81
563RD	Sanitop Deluxe™ Red	81
458	Skystep™ Red	83
562	Sanitop™ Red	83
566	Superflow® XT Series	85
567	Superflow® XT Nitrile	85
T23	Multi Mat II®	85
346	Sani-Trax™	87
348	Sani Master®	89

Anti-Slip Hygienic Matting Solutions

536	Akwadek™	93
538	Gripwalker Lite™	93
535	Soft-Step™	93

Chemical Resistance Chart	95
---------------------------	----

Notrax® Matting Testing & Pictograms

Notrax® Mats for Professional Use are subject to rigorous testing by independent laboratories prior to their introduction to the market.

Our Product Testing Charts show the following relative comparisons between the Notrax® mats featured in each category of this brochure:

Example Product Testing Chart



Wear resistance

Indicates the time it takes for a mat to lose its functionality. This is an accelerated wear test where the results are expressed in total weight loss of material when subjected to 5000 cycles under an abrasion wheel. The higher the pointer in the test chart, the greater its resistance to wear.

Slip resistance

Indicates the slip resistance of a mat. This test measures the force required to cause slippage of a load across the surface material. The coefficient is the ratio of force required divided by the weight. The higher the pointer in the test chart, the greater the coefficient of friction ratio, thus the better the slip resistance of a mat.

Anti-fatigue

Indicates the degree of comfort a mat provides. This test starts by measuring the original thickness of a mat. Then compression is applied and the thickness under this load is measured again. The difference between the two measurements is called deflection. The higher the pointer in the test chart, the better its anti-fatigue properties.



Anti-Fatigue

Matting restores balance, stimulates blood flow and helps reduce stress on the lower back and legs.



Grip Step®

Coating for extra adherence in extremely slippery areas. Slip resistance up to R13 according to DIN 51130.



Heavy Duty

Recommended for heavy duty use in industrial environments.



RedStop™

This uniquely engineered technology virtually eliminates the slipping and sliding of mats.



Anti-Slip

Matting designed to provide added traction through aggressive surface patterns.



Drainage

Open construction allows for liquids and debris to pass through, providing secure footing in a wet or dry environment.



Medium Duty

Recommended for medium duty use in industrial environments.



MicroStop™

Antibacterial treatment inhibits the growth of micro-organisms, bacteria and fungi.



Oil Resistant

Matting suitable for contact with industrial oils.



Protection

Absorbs impact, reduces breakage and protects floors.



Light Duty

Recommended for light duty use in industrial environments.



NFSI®

Tested and certified by the National Floor Safety Institute.



Welding

Made of durable fire retardant rubber compounds. These mats can be used in areas where welding takes place.



Non-Conductive

Matting formulated to provide insulation to protect workers in case of electrical shock.



Modular System

Interlocking mats for on-site customization can be assembled as standalone mats or wall-to-wall.



PAH 3

Category PAH 3 classification tested according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons.



ESD

Matting formulated to absorb static electricity. Avoids unpleasant static shock and safeguards equipment.



Wheeled Access

Matting suitable for wheeled access (i.e. carts).



Cold Resistant

Material can withstand freezing temperatures.




Barefoot

Pleasantly soft and warm under bare feet.



Fire Retardant

Matting designed to resist the spread of fire and withstand heat, substantiated by test certifications from independent laboratories.



Insulation

Matting insulates workers from cold/wet floors, heat, vibrations and noise to improve wellbeing.



Grease and Oil Resistant

Matting that is suitable for use in contact with vegetable oils and animal fats.



Cleaning

Suitable for cleaning with high pressure (hot) water jet.

Notrax® is a portfolio company of Justrite Safety Group.

For over a century, Justrite Safety Group has helped protect where the world works. Our mission is to identify workplace vulnerabilities and guide customers in creating an ecosystem of safety—so your team can work with confidence.

Confidence





Start with the EssentialSM



A Growing Justrite Family

In recent years we have grown, expanding Justrite Safety Group through the acquisition of other strong, valuable companies. Because of these exciting changes, we want to share our story with you—one of an unrivalled safety portfolio, expertise in environmental protection, a global network of brands, and a steadfast dedication to our customers' safety.

Start with the EssentialSM

The essence of our company is captured in a new tagline: Start with the EssentialSM. At Justrite, everything starts with safety. Protecting people, property and the planet is our first and greatest responsibility. We provide the essential safety products you need to protect your workers and workplace.

Our company logo has recently evolved. The new logo honours our heritage in fire safety, while reflecting our expertise in containment and environmental protection.

For more information, please visit www.notrax.eu/about-us.



Justrite Safety Group offers industrial safety solutions and expert advice from our portfolio companies around the world.

We cover every facet of the industrial safety landscape—from the storage, containment and clean-up of hazardous materials to motion safety and emergency showers.

Whatever your needs, we can help you build the foundation of a safe, productive workplace.





R.E.A.C.H.

REACH is the European Community Regulation on chemicals and their safe use (EC 1907/2006). It deals with the Registration, Evaluation, Authorisation and Restriction of Chemical substances. The law entered into force on 1 June 2007 assigns manufacturers the responsibility of providing high level human and environmental protection from the use of chemicals in manufacturing. Notrax® does not use any substances currently included on the SVHC (Substances of Very High Concerns) list under REACH, including Di-octyl phthalate (DOP) plasticizer. Further information about our stand on sustainability can be obtained at www.buynotrax.eu for registered distributors or upon email request to saleseu@justrite.com.

Product Warranty

All Notrax® floor matting is manufactured of the highest quality material and workmanship. Dependability and service of our products are guaranteed against defects in material for one year from date of purchase provided manufacturer's recommended usage and maintenance is followed. Buyer has the responsibility to determine the suitability of the product and assumes any liability in connection with such use. Seller shall not be liable for damages in excess of purchase price of product. In the unlikely event of a Notrax product being faulty, a full refund or replacement (based on manufacturer's discretion) will be made. Warranty claims must be authorized for return and shipped prepaid for inspection and evaluation. For information about floor matting maintenance: www.notrax.eu/news.

Notrax® offers the perfect solution for standing workers because unlike any other industrial safety matting manufacturer, we understand the difference of perceptions of workers as well as the variety of workplace conditions that exist. We therefore design and manufacture the largest range of safety matting to provide the right solution.

Notrax® is often referred to as one of the pioneers in anti-fatigue matting design and manufacturing. This is not surprising because since our founding in 1948, we have been committed to making quality products and optimizing processes.

Product Innovation

As one of the market leaders in anti-fatigue and safety matting, Notrax® Mats for Professional Use has become synonymous with quality, flexibility and customer service. What started as a small family-owned mat repair company has quickly grown to a global company. Now, as part of the Justrite Safety Group, we excel in the design and manufacturing of anti-fatigue and safety matting for industrial and commercial applications.

As the industry and manufacturing processes evolve, so do our matting products. We are constantly developing new products to meet the changing needs of the industry. We focus on customer problems and working together with them to create matting solutions that resolve the issue. Our innovations team continues to design state-of-the-art products through intense research and development using new technologies, new design techniques and new ideas.

Notrax® products are sold globally through our trusted distributor network of matting experts, operating in niche segments of ergonomics, cleaning and hygiene, health and safety, industrial supplies, installation experts, and many more. Understanding and responding to the markets specific needs reflects our interest and pleasure in serving our distributors and their customers. Examples of this include the development of mass customization capabilities and online integration with customers. As one of the world's largest integrated manufacturers of professional floor matting products, our belief in strong relationships is the foundation of our business.

With facilities in Europe and the United States, we constantly seek to reduce the environmental impact of our processes. It means that we aim to grow our business in an environmentally responsible manner, and we do this by focusing on diminishing waste, using recycled materials where possible, and by obtaining more materials from sustainable sources.

The "Lean" organization of our operations not only enables us to stay competitive and provide fast service, it also enables our customers to participate in a joint effort to reduce the carbon footprint simply by making use of our electronic purchasing and invoicing services and drop shipment capabilities.



Founded in 1948 by Charles J. Wood (far right).

This catalogue highlights the solutions Notrax® offers for your ergonomic anti-fatigue and safety matting applications. Feel free to also ask for the latest Notrax® brochure for Dust Control Matting for entrance ways.

Thank you for choosing Notrax®.

René Vieveen
Managing Director

Justrite Safety Group EMEA BV



Benefits of Anti-Fatigue Matting

In many industries, employees are required to work while standing, walking and/or carrying loads. Experts agree that matting can significantly improve productivity and employee satisfaction while reducing absenteeism and chronic illnesses related to long-term standing.




How Anti-Fatigue Matting Works


Standing on hard surfaces for long periods causes muscles to constrict, which reduces the blood flow. This makes muscles and joints hurt, and it causes blood to stagnate. Long-term standing causes pronation, or excessive flattening of the foot and can also lead to plantar fasciitis. Lower back pain is highest in workers who stand 4 hours or more per day.

How an anti-fatigue mat works is well described in an article that was published in the April 1999 issue of "Occupational Health & Safety", written by James M. Kendrick: "Anti-fatigue mats are engineered to make the body naturally and imperceptibly sway, which encourages subtle movement by calf and leg muscles. This promotes blood flow and keeps it from stagnating in the veins, which causes workers to feel fatigued."

As noted by Mr. Kendrick, the cushioning effect of anti-fatigue matting allows continuous micro-movements of the feet, which minimizes blood pooling in



With a mat



Without a mat

the legs. There is good reason to believe that reduction of fatigue also reduces the possibility of accidents and improves general work efficiency.

There are fewer days lost to injuries, fewer medical claims, and compliance with new health and safety requirements.

Too much cushioning can have a negative effect. Too much of softness or "give" will actually cause excessive fatigue because it overworks the muscles. Think of it like jogging in soft sand. Notrax® floor mats are made of specific formulations and designs for the right balance of cushioning and support fatigue relief which will contribute to increased productivity and employee satisfaction.


Scientific Support

Early studies such as Morgora (1972) showed that the incidence of lower back pain was highest in those workers who stood regularly for periods of more than four hours and Bousseman et al. (1982) brought to light that long term standing is a direct cause of pain and discomfort.

Subsequent research carried out by Dr. Mark Redfern and Dr. Don Chaffin at the Centre for Ergonomics, University of Michigan in 1988, and Paula Hinnen and Stephan Konz at the Department of Industrial Engineering, Kansas State University, 1994, made observations of the difference between standing on hard floors versus standing on soft floors. Both their studies concluded that mats significantly affect fatigue and comfort in different body regions.

More recent studies by Prof. Dr. Redha Taiar (2011, 2015, 2017) at the University of Reims in France illustrated how human mechanics in a working environment are impacted through the use of anti-fatigue mats. By observing workers' posture and measuring foot pressure for employees standing

The effects of standing on anti-fatigue matting versus hard or too soft floors

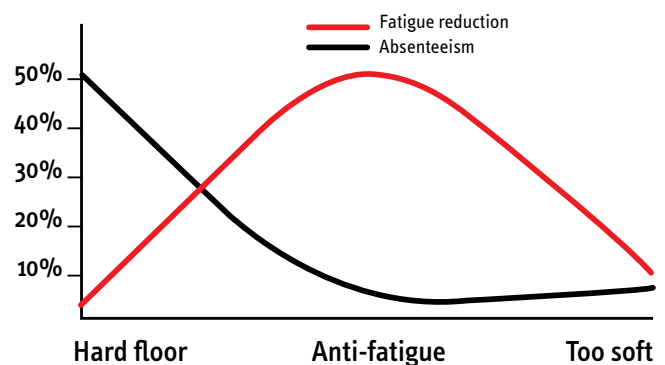

for long periods, Prof. Taiar was able to identify two causes of fatigue and therefore a two-pronged approach in combating the muscular-skeletal disorders associated with long-term standing.

Firstly, the worker should vary foot pressure while standing to eliminate the overuse of the same muscles (Cinderella Fibers). Secondly, using an anti-fatigue mat eliminates pressure points from the floor and spreads weight evenly to correct balance. Prof. Taiar's findings confirmed that pains are substantially reduced with the use of anti-fatigue mats compared to the initial situation without mats.

To request a copy of Prof. Taiar's research, Standing Smart, visit www.notrax.eu.

Industrial Specialties - Shock Absorbing Matting

Solutions to Protect Floors and Equipment

Durable protection mats protect both floors and heavy equipment from damage. The thick platform can withstand heavy weights while the non-slip textured top surface ensures sure footing and freedom of movement.

Made of tough rubber compounds that make the mats virtually indestructible.



040 Slabmat Carré™

High quality 100% natural rubber mat that absorbs the shock of fallen materials and protects floors and equipment. These interlocking mats allow on-site customization. Units of 91 cm x 91 cm can be easily laid out from wall-to-wall or as islands, in any direction or shape. Beveling solutions; allow out and inside corners.

Recommended uses:

- Heavy duty - dry areas for storage of heavy industrial equipment such as mould tools and engine blocks. Also suitable for gyms, weight rooms, skating rinks, golf courses, trailers and stables

Specifications:

- Heavy duty 100% natural rubber compound
- Overall thickness: 13 mm
- Weight: 18 kg per m²

Colours:


- Black

Stock sizes:

- 91 cm x 91 cm

Accessories:

- Sturdy male and female attachable bevels 91 cm x 5 cm, black and yellow

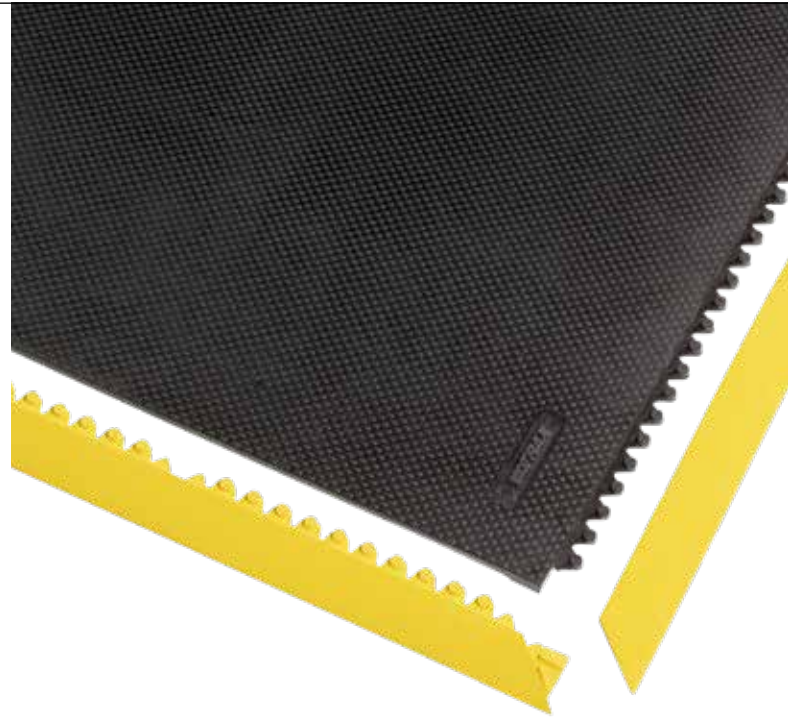

Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



045 Slabmat™

Indestructible rubber mat that absorbs the shock of fallen materials and protects floors and equipment. Loose lay mat with no installation required.

Recommended uses:

- Heavy duty - dry areas for storage of heavy industrial equipment such as mould tools and engine blocks. Also suitable for gyms, weight rooms, skating rinks, golf courses, trailers and stables

Specifications:

- Tough rubber compound
- Overall thickness: 12.7 mm
- Weight: 18 kg per m²

Colours:

- Black

Stock sizes:

- 120 cm x 180 cm



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



Industrial Specialties

PAH 3 Runners and Flooring

Runners can be used as flooring, shelf liners and near machines in all kinds of industrial applications to add extra traction or protection to industrial work floors, carts, cars or lorry boots. Liners can also be used any where objects tend to slide on work benches, tool boxes, countertops, cabinets

and shelves to protect scratching and marring of tools. Certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01. Withstands diluted acids and alkalis.



757 Rib 'n' Roll P3™ 3 mm fine rib

- SBR rubber
- Surface: fine rib profile
- Tested and certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Available by the linear meter



759 Rib 'n' Roll P3™ 3 mm broad rib

- SBR rubber
- Surface: broad rib profile
- Tested and certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Available by the linear meter



742 Table Tac P3™ 3 mm smooth

- SBR rubber
- Surface: smooth surface
- Tested and certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Available by the linear meter



737 Diamond Plate Runner


- Durable industrial vinyl flooring with rugged deck plate pattern for non-directional anti-slip
- PVC compound, resistant to industrial oils
- Surface: profile of raised diamonds.
- Tested and certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01
- Hardness (ISO7619) 83 Shore A
- Tear strength (ASTMD-1004): 35 N/mm²
- Elongation at break: 225%
- Abrasive resistance: 0,09 grams lost maximum
- Flammability: Bfl-S1 fire rating, testing according to EN 13501-1
- Colours: black/yellow, black, grey
- Stock sizes: 91 cm x 22.8 m, 122 cm x 22.8 m




Grooved Rubber Runners and Flooring

Rubber runners can be used as flooring for runners or as extra traction and protection, or work table liners on tool boxes, work benches, countertops, cabinets and shelves to protect scratching and marring of tools, tool boxes, flooring or surfaces the liner is applied on.


Durable rubber and PVC materials with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications in workshops, near machines and any place where objects may tend to slide on workbenches, carts, cars or lorry booths. Withstands diluted acids and alkalis.




750

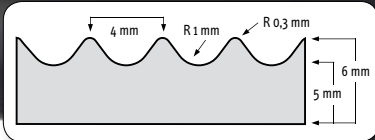


751



752

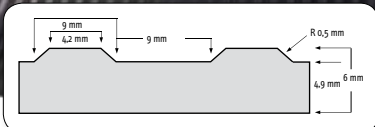

753

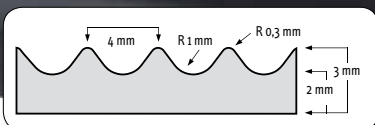

750RS

750 Rib 'n' Roll™ 3 mm fine rib

- SBR rubber
- Surface: fine rib profile
- Hardness (ISO7619, DIN53505): 60 Shore A
- Specific gravity (DIN53519): black 1.5 g/m³
- Tensile strength (DIN53504): 3.5 Mpa
- Elongation at break (DIN53504): 250%
- Abrasive resistance (ISO4649, DIN53516): 300-500 mm³
- Resistance to temperature: black -30°C, +70°C, grey -20°C, +70°C
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Stock sizes: grey 100 cm x 10 m
- Available by the linear meter



751 Rib 'n' Roll™ 6 mm fine rib

- Surface: fine rib profile
- Stock sizes: black 100 cm x 10 m
- Available by the linear meter



752 Rib 'n' Roll™ 3 mm broad rib

- Surface: broad rib profile
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Available by the linear meter



753 Rib 'n' Roll™ 6 mm broad rib

- Surface: broad rib profile
- Stock sizes: black 120 cm x 10 m
- Available by the linear meter



750RS Rib 'n' Roll™ RS 3 mm fine rib

- NBR/SBR rubber compound, grease resistant
- Surface: fine rib profile
- Hardness (ISO7619, DIN53505): 60 Shore A
- Specific gravity (DIN53519): black 1.5 g/m³
- Tensile strength (DIN53504): 3.5 Mpa
- Elongation at break (DIN53504): 250%
- Abrasive resistance (ISO4649, DIN53516): 300-500 mm³
- Resistance to temperature: black -10°C, +70°C
- Stock sizes: black 100 cm x 10 m
- Available by the linear meter




Non-directional Runners and Flooring

746 Check 'n' Roll™ 3 mm


Ideal flooring for factory and warehouse premises or any kind of industrial applications to protect floors and materials. Withstands diluted acids and alkalis.

- NR-SBR rubber
- Surface: industrial checker plate profile
- Hardness (ISO7619, DIN53505): 70 Shore A
- Density: black 1,45 g/m³, grey 1,60 g/m³
- Tear strength (ISO 34-1): black 4 N/mm², grey 5 N/mm²
- Elongation at break: black 200%, grey 350%
- Abrasive resistance (ISO4649, DIN53516): 300-500 mm³
- Dimensional stability (EN 434): 0.15%
- Resistance to temperature: black -30°C, +70°C, grey -20°C, +70°C
- Sound reduction: 20 dB
- Stock sizes: black 140 cm x 10 m
- Stock sizes: grey 140 cm x 10 m
- Available by the linear meter

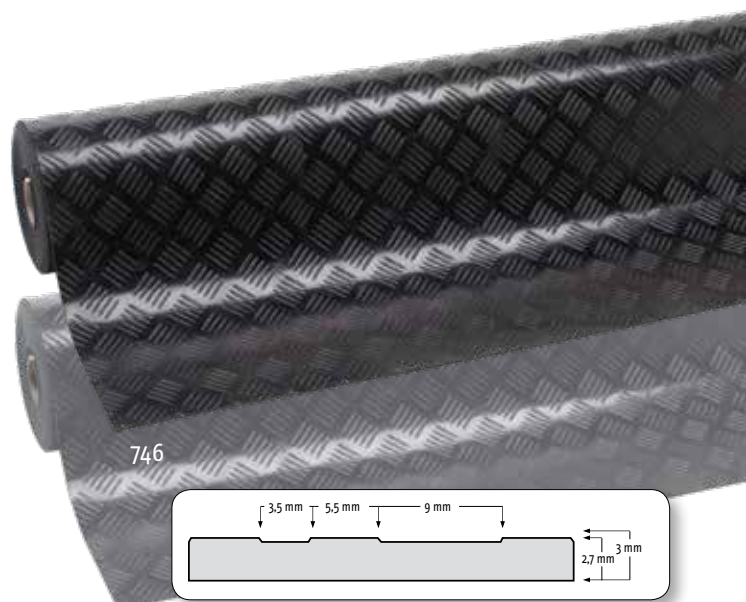

746GR Check'n'Roll™ 3 mm nitrile


- NBR (nitrile) rubber
- Surface: industrial checker plate profile
- Oil resistant
- Hardness (ISO7619, DIN53505): 65 Shore A
- Density: 1.43 g/m³
- Tear strength (ISO 34-1): 7 N/mm²
- Elongation at break: 250%
- Abrasive resistance (ISO4649, DIN53516): 300-500 mm³
- Dimensional stability (EN 434): 0.15%
- Resistance to temperature: -10°C, +70°C
- Sound reduction: 20 dB
- Stock sizes: black 140 cm x 10 m
- Available by the linear meter

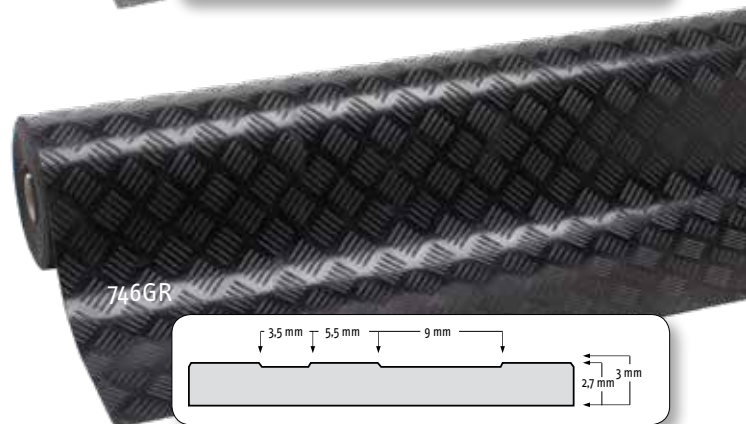

745 Dots'n'Roll™ 3.5 mm

All-round floor covering for industrial and general applications. Suitable for buildings, walking areas, stations, airports, supermarkets, lifts, buses, ships, etc

- SBR rubber
- Surface: profile of mildly raised dots
- Hardness (ISO7619) 75 Shore A
- Tear strength (ISO 34-1): 20 N/mm²
- Elongation at break: 250%
- Abrasive resistance (ISO4649): 250 mm³
- Dimensional stability (EN 434): 0.4%
- Resistance to temperature: -20°C, +70°C
- Sound reduction: 20 dB
- Stock sizes: black 100 cm x 10 m
- Stock sizes: grey 100 cm x 10 m

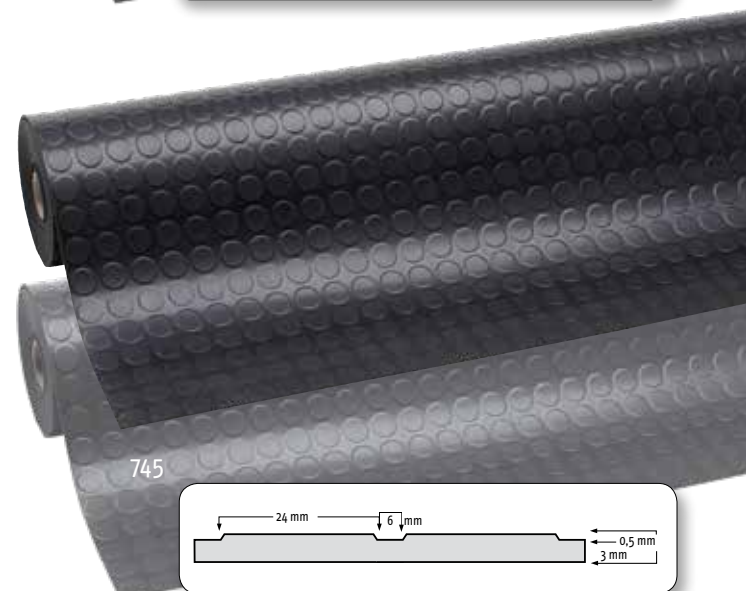

681 Grit Trax™

Gritted oil resistant vinyl with mineral coating for slip prevention in extremely wet or oily areas. Slip resistant vinyl backing.

- Overall thickness: 2.1 mm
- Weight: 2.3 kg per m²

Stock Sizes:

- 90 cm x 150 cm
- 90 cm x 18.3 m

Custom lengths:

- 90 cm width per linear meter

