

Mats for Professional Use

Ergonomic Anti-Fatigue and Safety Matting



Index and Guide

Notrax® Product Testing	3
Notrax® Matting Pictograms	3
Notrax® Mats for Professional Use	6
Benefits of Anti-Fatigue Matting	8

Art	Product	Page
-----	---------	------

Workplace Solutions for Dry Areas 10

782	Sky Trax®	12
479	Cushion Trax®	14
489	Cushion Flex™	16
406	Crossrib Sof-Tred™	19
413	Gripper Sof-Tred™	19
417	Bubble Sof-Tred™	19
419	Diamond Sof-Tred™	19
408	Airug® Plus	21
409	Sof-Tred Plus™	21
410	Airug®	21
411	Sof-Tred™	21
649	Safety Stance Solid™	22
546	Diamond Flex™ Series	24
556	Cushion Ease Solid™ Series	26
570	De-Flex™ Series	28
460	SkywalkerHD™ Series	30
460	SkywalkerHD™ Accessories	32
426	Posture Mat™	35
425	Posture Mat Classic™	35
450	Skywalker® PUR Series	38
455	Skystep™ Series	40
526G	Sani-Flex™	40

Workplace Solutions for Wet Areas 42

549	Safety Stance™	44
550	Cushion Ease™ Series	46
563	Sanitop Deluxe™	49
562	Sanitop™	49
567	Superflow® XT Nitrile	49
T23	Multi Mat II®	49
537	Flexdek™	51
539	Gripwalker™	51
620	Diamond Flex Lok™	53
620	Diamond Flex Lok™ Solid	53

Art	Product	Page
-----	---------	------

Electrostatic Discharge (ESD) Solutions 54

826	Diamond Stat™	57
825	Cushion Stat™	57
828	High Tech POP™ 3 Layer	59
829	Anti-Stat POP™ 3 Layer	59
827	Anti-Stat POP™	59
	ESD Accessories	60
754	Rib 'n' Roll™ ESD 3 mm fine rib	61
743	Conductive Runner™	61

Industrial Specialties

832	Switchboard Matting™ Series	65
979	Saddle Trax®	67
580	Sorb Stance™	69
585	Eco Stance™	69
040	Slabmat Carre™	71
045	Slabmat™	71

Rubber Runners & Liners 73

Food Processing & Food Service Matting Solutions 76

526	Sani-Flex™	79
550RD	Cushion Ease™ Red	81
563RD	Sanitop Deluxe™ Red	81
458	Skystep™ Red	83
562	Sanitop™ Red	83
566	Superflow® XT Series	85
567	Superflow® XT Nitrile	85
T23	Multi Mat II®	85
346	Sani-Trax™	87
348	Sani Master®	89

Anti-Slip Hygienic Matting Solutions 90

536	Akwadek™	93
538	Gripwalker Lite™	93
535	Soft-Step™	93

Chemical Resistance Chart	95
---------------------------	----

Notrax® Matting Testing & Pictograms

Notrax® Mats for Professional Use are subject to rigorous testing by independent laboratories prior to their introduction to the market.

Our Product Testing Charts show the following relative comparisons between the Notrax® mats featured in each category of this brochure:

Example Product Testing Chart



Wear resistance

Indicates the time it takes for a mat to lose its functionality. This is an accelerated wear test where the results are expressed in total weight loss of material when subjected to 5000 cycles under an abrasion wheel. The higher the pointer in the test chart, the greater its resistance to wear.

Slip resistance

Indicates the slip resistance of a mat. This test measures the force required to cause slippage of a load across the surface material. The coefficient is the ratio of force required divided by the weight. The higher the pointer in the test chart, the greater the coefficient of friction ratio, thus the better the slip resistance of a mat.

Anti-fatigue

Indicates the degree of comfort a mat provides. This test starts by measuring the original thickness of a mat. Then compression is applied and the thickness under this load is measured again. The difference between the two measurements is called deflection. The higher the pointer in the test chart, the better its anti-fatigue properties.



Anti-Fatigue

Matting restores balance, stimulates blood flow and helps reduce stress on the lower back and legs.



Grip Step®

Coating for extra adherence in extremely slippery areas. Slip resistance up to R13 according to DIN 51130.



Heavy Duty

Recommended for heavy duty use in industrial environments.



RedStop™

This uniquely engineered technology virtually eliminates the slipping and sliding of mats.



Anti-Slip

Matting designed to provide added traction through aggressive surface patterns.



Drainage

Open construction allows for liquids and debris to pass through, providing secure footing in a wet or dry environment.



Medium Duty

Recommended for medium duty use in industrial environments.



MicroStop™

Antibacterial treatment inhibits the growth of micro-organisms, bacteria and fungi.



Oil Resistant

Matting suitable for contact with industrial oils.



Protection

Absorbs impact, reduces breakage and protects floors.



Light Duty

Recommended for light duty use in industrial environments.



NFSI®

Tested and certified by the National Floor Safety Institute.



Welding

Made of durable fire retardant rubber compounds. These mats can be used in areas where welding takes place.



Non-Conductive

Matting formulated to provide insulation to protect workers in case of electrical shock.



Modular System

Interlocking mats for on-site customization can be assembled as standalone mats or wall-to-wall.



PAH 3

Category PAH 3 classification tested according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons.



ESD

Matting formulated to absorb static electricity. Avoids unpleasant static shock and safeguards equipment.



Wheeled Access

Matting suitable for wheeled access (i.e. carts).



Cold Resistant

Material can withstand freezing temperatures.




Barefoot

Pleasantly soft and warm under bare feet.



Fire Retardant

Matting designed to resist the spread of fire and withstand heat, substantiated by test certifications from independent laboratories.



Insulation

Matting insulates workers from cold/wet floors, heat, vibrations and noise to improve wellbeing.



Grease and Oil Resistant

Matting that is suitable for use in contact with vegetable oils and animal fats.



Cleaning

Suitable for cleaning with high pressure (hot) water jet.

Notrax® is a portfolio company of Justrite Safety Group.

For over a century, Justrite Safety Group has helped protect where the world works. Our mission is to identify workplace vulnerabilities and guide customers in creating an ecosystem of safety—so your team can work with confidence.

Confidence





Start with the EssentialSM



A Growing Justrite Family

In recent years we have grown, expanding Justrite Safety Group through the acquisition of other strong, valuable companies. Because of these exciting changes, we want to share our story with you—one of an unrivalled safety portfolio, expertise in environmental protection, a global network of brands, and a steadfast dedication to our customers' safety.

Start with the EssentialSM

The essence of our company is captured in a new tagline: Start with the EssentialSM. At Justrite, everything starts with safety. Protecting people, property and the planet is our first and greatest responsibility. We provide the essential safety products you need to protect your workers and workplace.

Our company logo has recently evolved. The new logo honours our heritage in fire safety, while reflecting our expertise in containment and environmental protection.

For more information, please visit www.notrax.eu/about-us.



Justrite Safety Group offers industrial safety solutions and expert advice from our portfolio companies around the world.

We cover every facet of the industrial safety landscape—from the storage, containment and clean-up of hazardous materials to motion safety and emergency showers.

Whatever your needs, we can help you build the foundation of a safe, productive workplace.





R.E.A.C.H.

REACH is the European Community Regulation on chemicals and their safe use (EC 1907/2006). It deals with the Registration, Evaluation, Authorisation and Restriction of Chemical substances. The law entered into force on 1 June 2007 assigns manufacturers the responsibility of providing high level human and environmental protection from the use of chemicals in manufacturing. Notrax® does not use any substances currently included on the SVHC (Substances of Very High Concerns) list under REACH, including Di-octyl phthalate (DOP) plasticizer. Further information about our stand on sustainability can be obtained at www.buynotrax.eu for registered distributors or upon email request to saleseu@justrite.com.

Product Warranty

All Notrax® floor matting is manufactured of the highest quality material and workmanship. Dependability and service of our products are guaranteed against defects in material for one year from date of purchase provided manufacturer's recommended usage and maintenance is followed. Buyer has the responsibility to determine the suitability of the product and assumes any liability in connection with such use. Seller shall not be liable for damages in excess of purchase price of product. In the unlikely event of a Notrax product being faulty, a full refund or replacement (based on manufacturer's discretion) will be made. Warranty claims must be authorized for return and shipped prepaid for inspection and evaluation. For information about floor matting maintenance: www.notrax.eu/news.

Notrax® offers the perfect solution for standing workers because unlike any other industrial safety matting manufacturer, we understand the difference of perceptions of workers as well as the variety of workplace conditions that exist. We therefore design and manufacture the largest range of safety matting to provide the right solution.

Notrax® is often referred to as one of the pioneers in anti-fatigue matting design and manufacturing. This is not surprising because since our founding in 1948, we have been committed to making quality products and optimizing processes.

Product Innovation

As one of the market leaders in anti-fatigue and safety matting, Notrax® Mats for Professional Use has become synonymous with quality, flexibility and customer service. What started as a small family-owned mat repair company has quickly grown to a global company. Now, as part of the Justrite Safety Group, we excel in the design and manufacturing of anti-fatigue and safety matting for industrial and commercial applications.

As the industry and manufacturing processes evolve, so do our matting products. We are constantly developing new products to meet the changing needs of the industry. We focus on customer problems and working together with them to create matting solutions that resolve the issue. Our innovations team continues to design state-of-the-art products through intense research and development using new technologies, new design techniques and new ideas.

Notrax® products are sold globally through our trusted distributor network of matting experts, operating in niche segments of ergonomics, cleaning and hygiene, health and safety, industrial supplies, installation experts, and many more. Understanding and responding to the markets specific needs reflects our interest and pleasure in serving our distributors and their customers. Examples of this include the development of mass customization capabilities and online integration with customers. As one of the world's largest integrated manufacturers of professional floor matting products, our belief in strong relationships is the foundation of our business.

With facilities in Europe and the United States, we constantly seek to reduce the environmental impact of our processes. It means that we aim to grow our business in an environmentally responsible manner, and we do this by focusing on diminishing waste, using recycled materials where possible, and by obtaining more materials from sustainable sources.

The "Lean" organization of our operations not only enables us to stay competitive and provide fast service, it also enables our customers to participate in a joint effort to reduce the carbon footprint simply by making use of our electronic purchasing and invoicing services and drop shipment capabilities.



Founded in 1948 by Charles J. Wood (far right).

This catalogue highlights the solutions Notrax® offers for your ergonomic anti-fatigue and safety matting applications. Feel free to also ask for the latest Notrax® brochure for Dust Control Matting for entrance ways.

Thank you for choosing Notrax®.

René Vieveen
Managing Director

Justrite Safety Group EMEA BV



Benefits of Anti-Fatigue Matting

In many industries, employees are required to work while standing, walking and/or carrying loads. Experts agree that matting can significantly improve productivity and employee satisfaction while reducing absenteeism and chronic illnesses related to long-term standing.




How Anti-Fatigue Matting Works


Standing on hard surfaces for long periods causes muscles to constrict, which reduces the blood flow. This makes muscles and joints hurt, and it causes blood to stagnate. Long-term standing causes pronation, or excessive flattening of the foot and can also lead to plantar fasciitis. Lower back pain is highest in workers who stand 4 hours or more per day.

How an anti-fatigue mat works is well described in an article that was published in the April 1999 issue of "Occupational Health & Safety", written by James M. Kendrick: "Anti-fatigue mats are engineered to make the body naturally and imperceptibly sway, which encourages subtle movement by calf and leg muscles. This promotes blood flow and keeps it from stagnating in the veins, which causes workers to feel fatigued."

As noted by Mr. Kendrick, the cushioning effect of anti-fatigue matting allows continuous micro-movements of the feet, which minimizes blood pooling in



With a mat



Without a mat

the legs. There is good reason to believe that reduction of fatigue also reduces the possibility of accidents and improves general work efficiency.

There are fewer days lost to injuries, fewer medical claims, and compliance with new health and safety requirements.

Too much cushioning can have a negative effect. Too much of softness or "give" will actually cause excessive fatigue because it overworks the muscles. Think of it like jogging in soft sand. Notrax® floor mats are made of specific formulations and designs for the right balance of cushioning and support fatigue relief which will contribute to increased productivity and employee satisfaction.


Scientific Support

Early studies such as Morgora (1972) showed that the incidence of lower back pain was highest in those workers who stood regularly for periods of more than four hours and Bousseman et al. (1982) brought to light that long term standing is a direct cause of pain and discomfort.

Subsequent research carried out by Dr. Mark Redfern and Dr. Don Chaffin at the Centre for Ergonomics, University of Michigan in 1988, and Paula Hinnen and Stephan Konz at the Department of Industrial Engineering, Kansas State University, 1994, made observations of the difference between standing on hard floors versus standing on soft floors. Both their studies concluded that mats significantly affect fatigue and comfort in different body regions.

More recent studies by Prof. Dr. Redha Taiar (2011, 2015, 2017) at the University of Reims in France illustrated how human mechanics in a working environment are impacted through the use of anti-fatigue mats. By observing workers' posture and measuring foot pressure for employees standing

The effects of standing on anti-fatigue matting versus hard or too soft floors

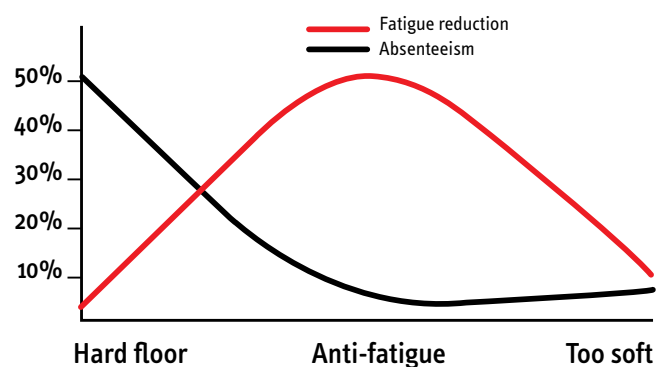

for long periods, Prof. Taiar was able to identify two causes of fatigue and therefore a two-pronged approach in combating the muscular-skeletal disorders associated with long-term standing.

Firstly, the worker should vary foot pressure while standing to eliminate the overuse of the same muscles (Cinderella Fibers). Secondly, using an anti-fatigue mat eliminates pressure points from the floor and spreads weight evenly to correct balance. Prof. Taiar's findings confirmed that pains are substantially reduced with the use of anti-fatigue mats compared to the initial situation without mats.

To request a copy of Prof. Taiar's research, Standing Smart, visit www.notrax.eu.

Workplace Solutions for Dry Areas

Working environments and conditions vary for different companies and industries. An effective plant layout can increase efficiency and reduce cost. Notrax® has created several modular, linear and standalone anti-fatigue

matting series that are completely customizable, thereby reducing fatigue, increasing productivity and reducing the risk of musculoskeletal disorders that lead to long-term absence.



Many facilities have moved towards cellular manufacturing layouts within larger process layouts. This includes automated material-handling equipment, specially automated storage and retrieval systems, automated guided vehicle systems, automatic transfer devices, turntables and other product to person solutions. Layouts are being redesigned for quality and flexibility, the ability to quickly shift to different product models or to different production rates.

Workstation ergonomics have therefore become even more important as work has become more specialized and repetitive. Anti-fatigue matting can be used as a freestanding mat or customized into just about any size to fit specific areas around machinery or following assembly lines to create the most efficient and effective layout while ensuring the most efficient and ergonomic workstation for workers.

Notrax® matting solutions are manufactured in specialized compounds to meet the distinct needs of various industrial environments such as oil resistance, ESD electrostatic discharge protection, fire retardant for welding areas, or a combination thereof.

Technical Installation Service

An appointment can be made with our field sales team to conduct a safety audit and to help plan the layout of the matting project as well as select and test the best matting products for the application. A preparation visit can be made in advance for specific measurements, product selection and technical drawings for review. Our own Leon Wijntjes will be heading up the technical installation team as our matting installation expert (pictured right).




As part of our custom matting service, our experienced design team can create 3D custom drawings to your specifications based on your dimensions and preferred mat choice.

We are dedicated to achieving the highest standards of service combined with our professionalism, exceptional products and materials, from the initial preparation and the finishing touches.

Guide for Ordering Custom Size Matting

- Custom designs for any specific workstation are possible.
- To order, simply provide a sketch that illustrates the shape, dimensions, and where the ramp edges are required.
- You will receive our CAD drawing for approval.
- Oversized mats are made in sections that interlock on site, to facilitate shipping and handling.

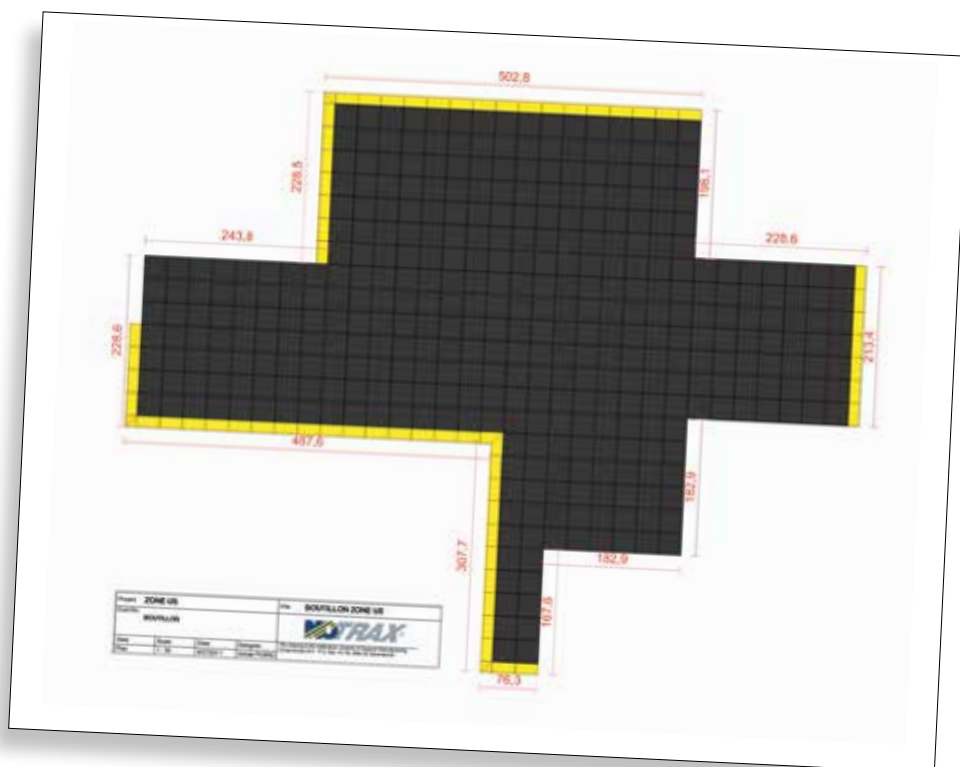

For more information, or to make an appointment for a site visit, request a custom design or installation service, please visit: <https://www.notrax.eu/technical-installation-services>

Dry Areas - Heavy Duty Industrial

782 Sky Trax®

Top-of-the-line ergonomic experience where comfort, durability, and safety are united. Ergonomic benefit derived from unique bubble design coupled with 19 mm thick worker platform.

Combination of extra hard wearing top surface and a very resilient microcellular vinyl base for maximum fatigue relief.



782 Sky Trax®

Favours slip resistance and freedom of movement; tested R9 according to DIN51130 and BG-rule BGR181. Featured with RedStop™ slip resistant backing to prevent mats from shifting. Available yellow borders along sides comply with OSHA code 1910-144. Bevelled edges on all four sides to minimize risk of tripping. Lifetime warranty on Uni-Fusion™ lamination technology.

Recommended uses:

- Heavy duty - dry industrial environments in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual workstations. Also suitable for commercial environments including hotels, reception desks, shop counters, department stores, banks, restaurants, etc.

Specifications:

- 5 mm PVC top surface permanently bonded onto a 14 mm resilient backing of microcellular vinyl
- Overall thickness: 19 mm
- Weight: 6.9 kg per m²
- Fire classification Cfl-S2 tested according to DIN EN ISO 13501

Colours:

- Grey, Black, Black/yellow

Stock sizes:

- 60 cm x 91 cm
- 91 cm x 150 cm
- 91 cm x 2 m
- 91 cm x 3 m
- 91 cm x 6 m

Full rolls 21.9 m:

- 60 cm, 91 cm, 122 cm and 152 cm widths

Custom lengths:

- 60 cm, 91 cm, 122 cm and 152 cm widths



Dry Areas - Heavy Duty Industrial **479 Cushion Trax®**

Bestselling anti-fatigue mat with ergonomic benefit derived from a 14-mm thick worker platform comprised of a long wearing top surface laminated onto a resilient microcellular vinyl base for maximum durability, comfort, and insulation from hard floors and vibrations.

Diamond plate pattern provides traction while allowing easy twist turns. The design and material composition make this the most versatile matting solution for fatigue relief in both static and dynamic working positions.



479 Cushion Trax®

Slip resistance R10 according to DIN51130 and BG-rule BGR181. Tested and certified by the National Floor Safety Institute (NFSI). Featured with RedStop™ slip resistant backing to prevent mats from shifting. Available yellow borders along sides comply with OSHA code 1910-144. Bevelled edges on all four sides to minimize risk of tripping. UniFusion™ technology engineered to resist in the harshest work environments.

Recommended uses:

- Heavy duty - dry industrial environments in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual workstations. Also suitable for commercial environments including hotels, reception desks, shop counters, department stores, banks, restaurants, etc.

Specifications:

- 4.7 mm PVC top surface permanently bonded onto a 9.3 mm resilient backing of microcellular vinyl
- Overall thickness: 14 mm
- Weight: 5.5 kg per m²
- Fire classification Bfl-S1 tested according to EN 13501-1
- Coefficient of friction NSF1 certified
- REACH compliant

Colours:

- Grey, Black, Black/yellow

Stock sizes:


- 60 cm x 91 cm
- 91 cm x 150 cm
- 91 cm x 3 m
- 91 cm x 6 m

Full rolls 22.8 m:

- 60 cm, 91 cm, 122 cm and 152 cm widths

Custom lengths:

- 60 cm, 91 cm, 122 cm and 152 cm widths




Dry Oily Areas - Heavy Duty Industrial

489 Cushion Flex®

Oil-resistant version of the Cushion Trax®. Best known for its diamond plate top surface and high level of ergonomic comfort in both dynamic and stationary working positions.

A 12.7-mm thick worker platform offers maximum durability, comfort, and insulation from hard floors and vibrations. 100% nitrile rubber compound is resistant to most industrial oils.

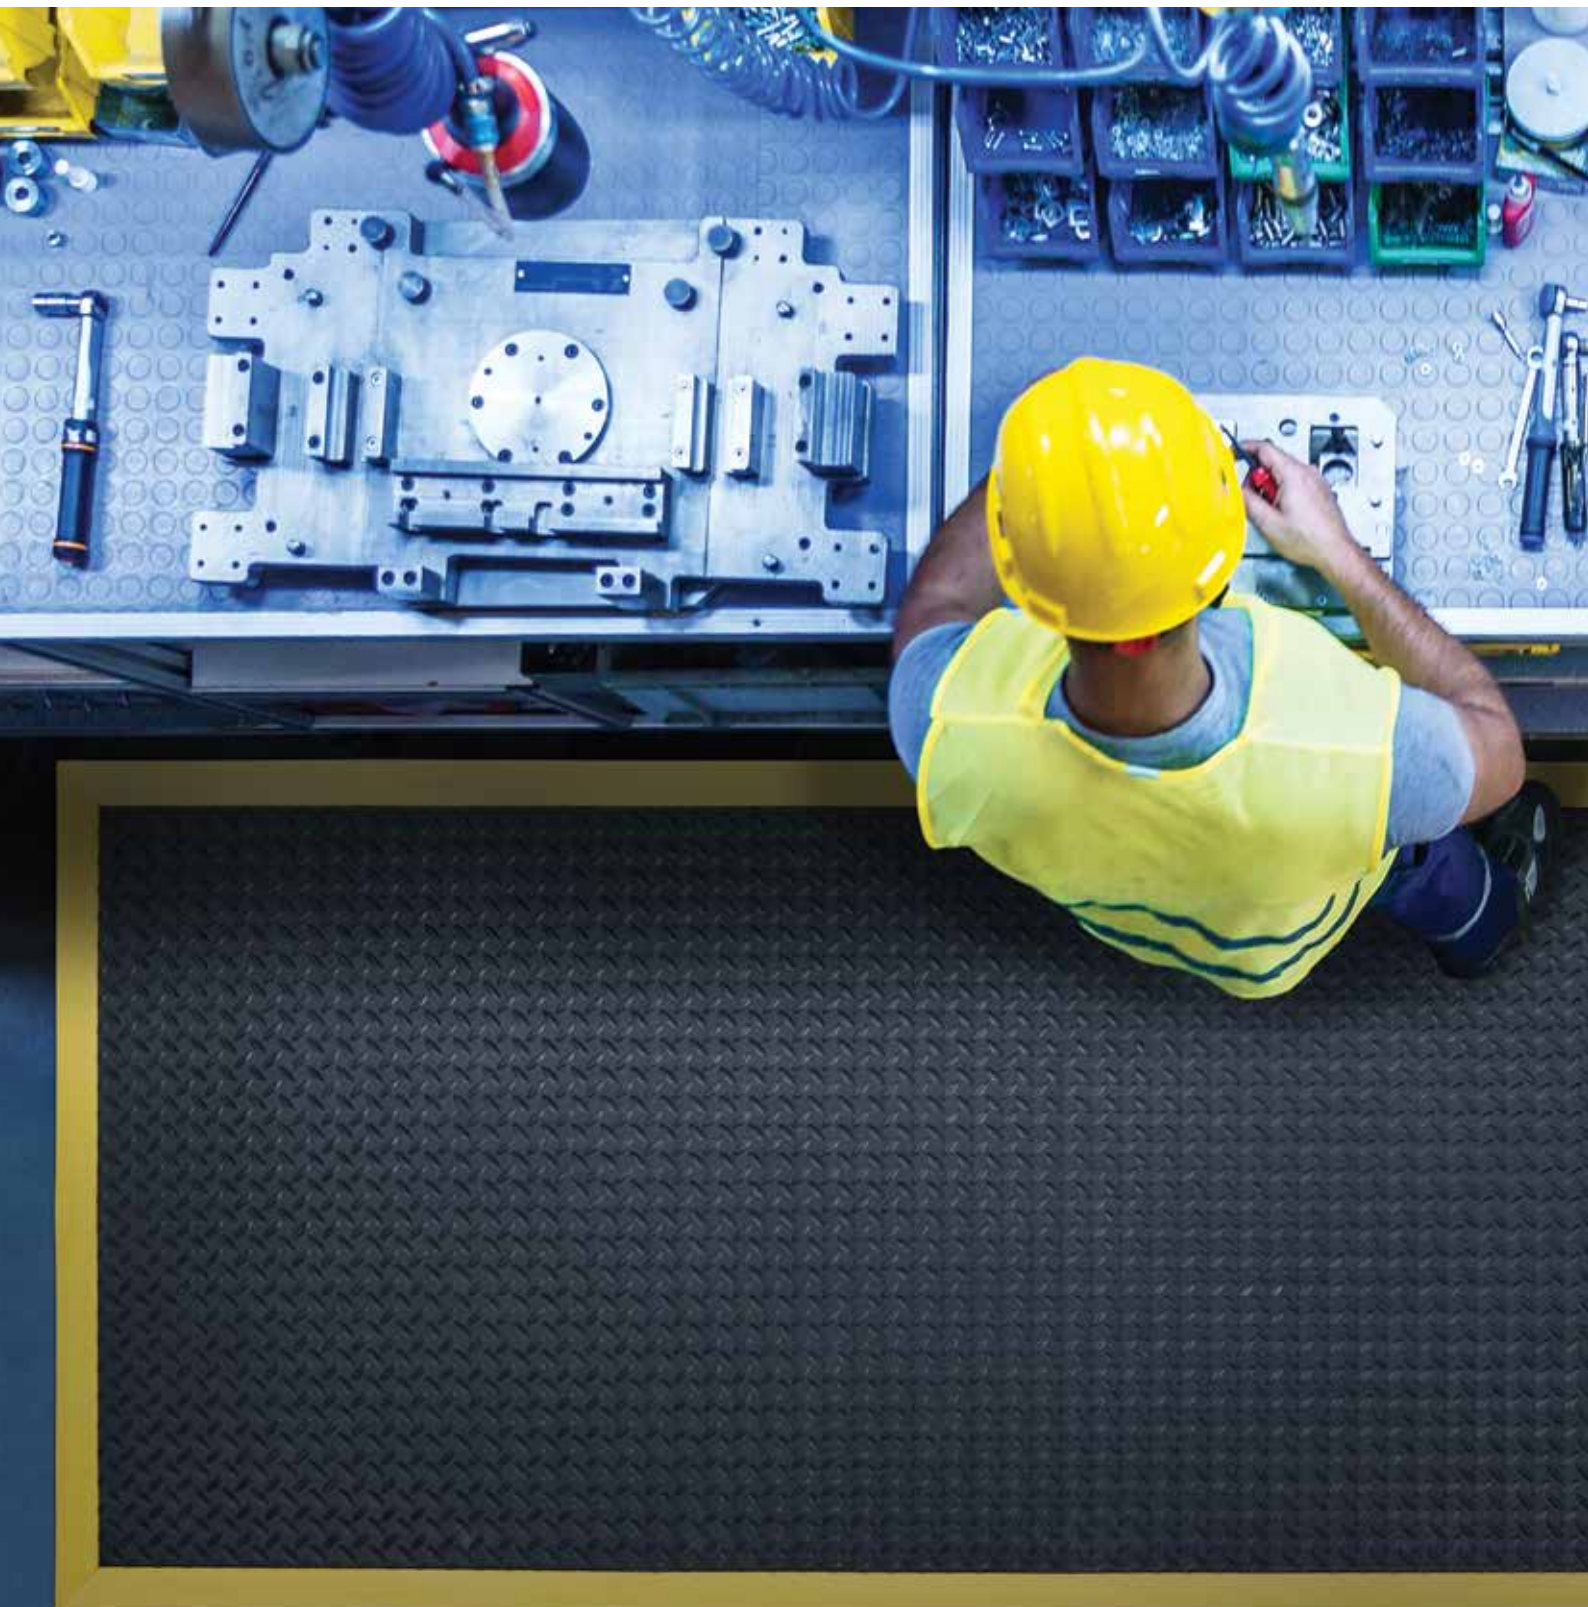

489 Cushion Flex®

Standard size anti-fatigue mats for individual workstations are loose lay and require no installation. Highly visible yellow or orange bevelled edges on all sides for added safety to minimize risk of tripping and comply with OSHA code 1910-144.

Recommended uses:

- Heavy duty - dry oily industrial environments in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual workstations.

Specifications:



- Heavy duty 100% nitrile rubber compound
- Resistant to industrial oils and harsh chemicals
- Overall thickness: 12.7 mm
- Weight: 5.5 kg per m²

Colours:

- Black/yellow
- Black
- Black/orange

Stock sizes:

- 91 cm x 210 cm

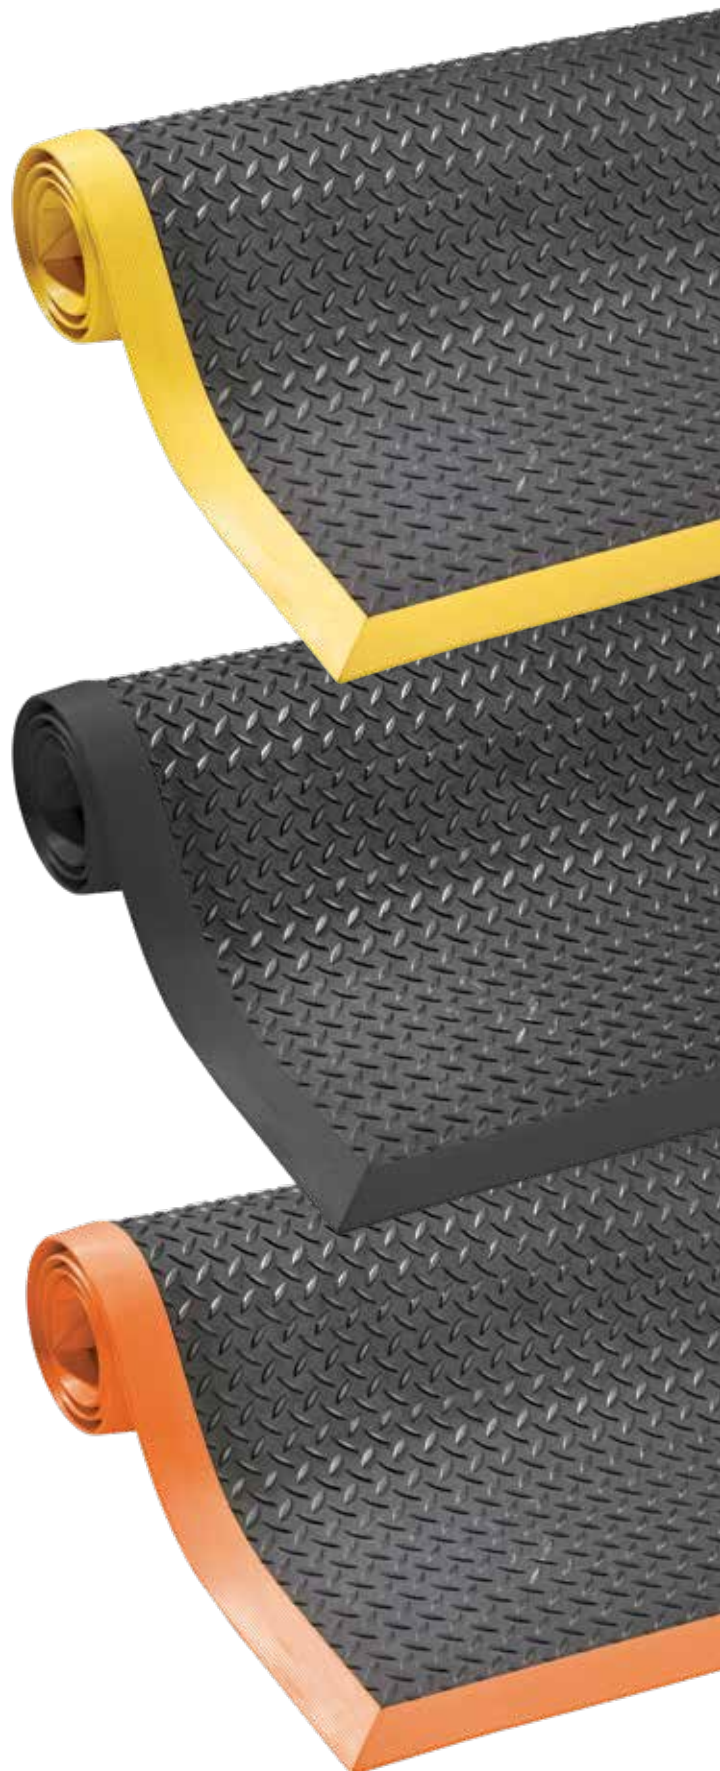

Dry Areas - Medium Duty Industrial **Dyna-Shield™**

Exceptional worker comfort due to 12.7 mm thick specially formulated compound. Protective layer of exclusive Dyna-Shield™ extends service life by 50% compared to regular microcellular vinyl*.

Available with yellow borders along sides comply with OSHA code 1910-144. All 4 sides are bevelled and sealed to minimize tripping hazards.

*Supported by independent laboratory testing.



406 Crossrib Sof-Tred™

Specifications:

- Side-to-side wide ribs provide traction and easy to sweep clean
- Colours: Black/yellow, Grey
- Thickness: 12.7 mm
- Weight: 4 kg per m²

Stock sizes:



- 60 cm x 91 cm
- 91 cm x 150 cm

Full rolls 18.3 m:

- 60 cm, 91 cm, and 122 cm widths

Custom lengths:

- 60 cm, 91 cm, and 122 cm widths

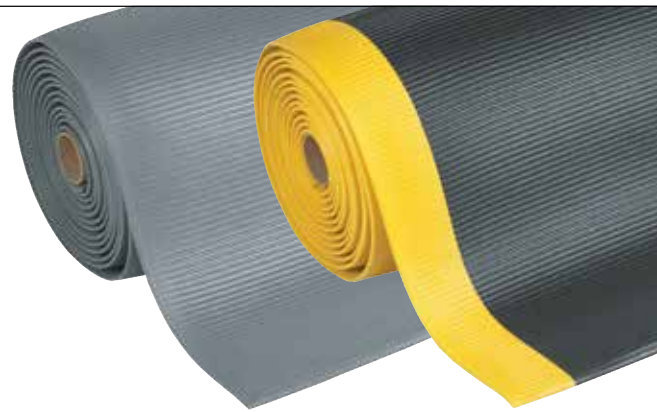

413 Gripper Sof-Tred™

Specifications:

- Lengthwise corrugated rib pattern for sure footing
- Colours: Black/yellow, Grey
- Thickness: 12.7 mm
- Weight: 4 kg per m²

Stock sizes:



- 60 cm x 91 cm
- 91 cm x 150 cm

Full rolls 18.3 m:

- 60 cm, 91 cm, and 122 cm widths

Custom lengths:

- 60 cm, 91 cm, and 122 cm widths

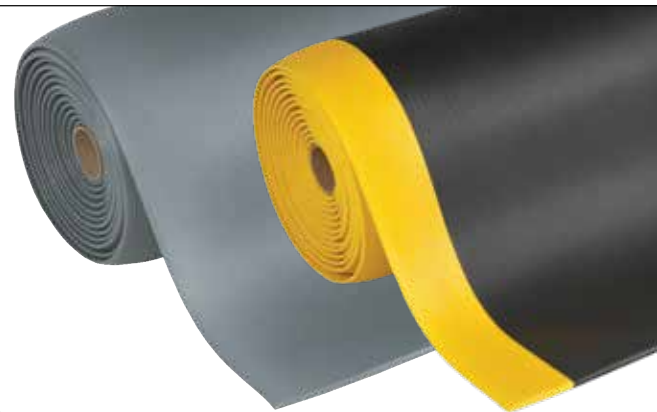

417 Bubble Sof-Tred™

Specifications:

- Unique bubble design provides exceptional comfort
- Colours: Black/yellow, Grey
- Thickness: 12.7 mm
- Weight: 4 kg per m²

Stock sizes:



- 60 cm x 91 cm
- 91 cm x 150 cm

Full rolls 18.3 m:

- 60 cm, 91 cm, and 122 cm widths

Custom lengths:

- 60 cm, 91 cm, and 122 cm widths

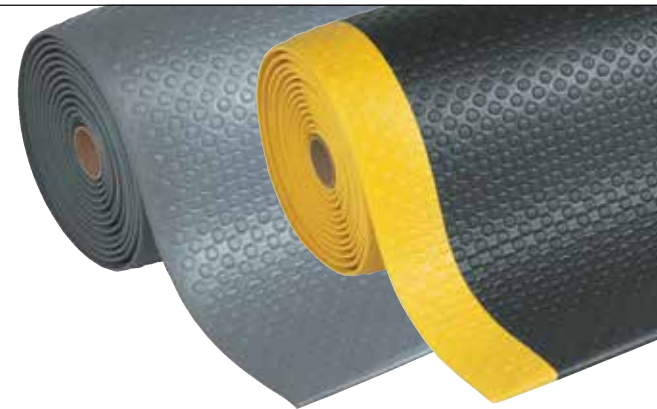

419 Diamond Sof-Tred™

Specifications:

- Non-directional "Deck Plate" pattern allows freedom of movement
- Colours: Black/yellow, Grey, Black
- Thickness: 12.7 mm
- Weight: 4 kg per m²

Stock sizes:


- 60 cm x 91 cm
- 91 cm x 150 cm

Full rolls 18.3 m:

- 60 cm, 91 cm, and 122 cm widths

Custom lengths:


- 60 cm, 91 cm, and 122 cm widths



Dry Areas - Light/Medium Duty Industrial **Comfort**

Basic worker comfort derived from a 9.4-mm thick worker platform comprised of a construction of microcellular vinyl consisting of millions of air bubbles.

All four sides are bevelled and sealed to minimize tripping hazards. Airug® Plus and Sof-Tred Plus™ versions have a higher foam density providing a better balance of comfort and support.

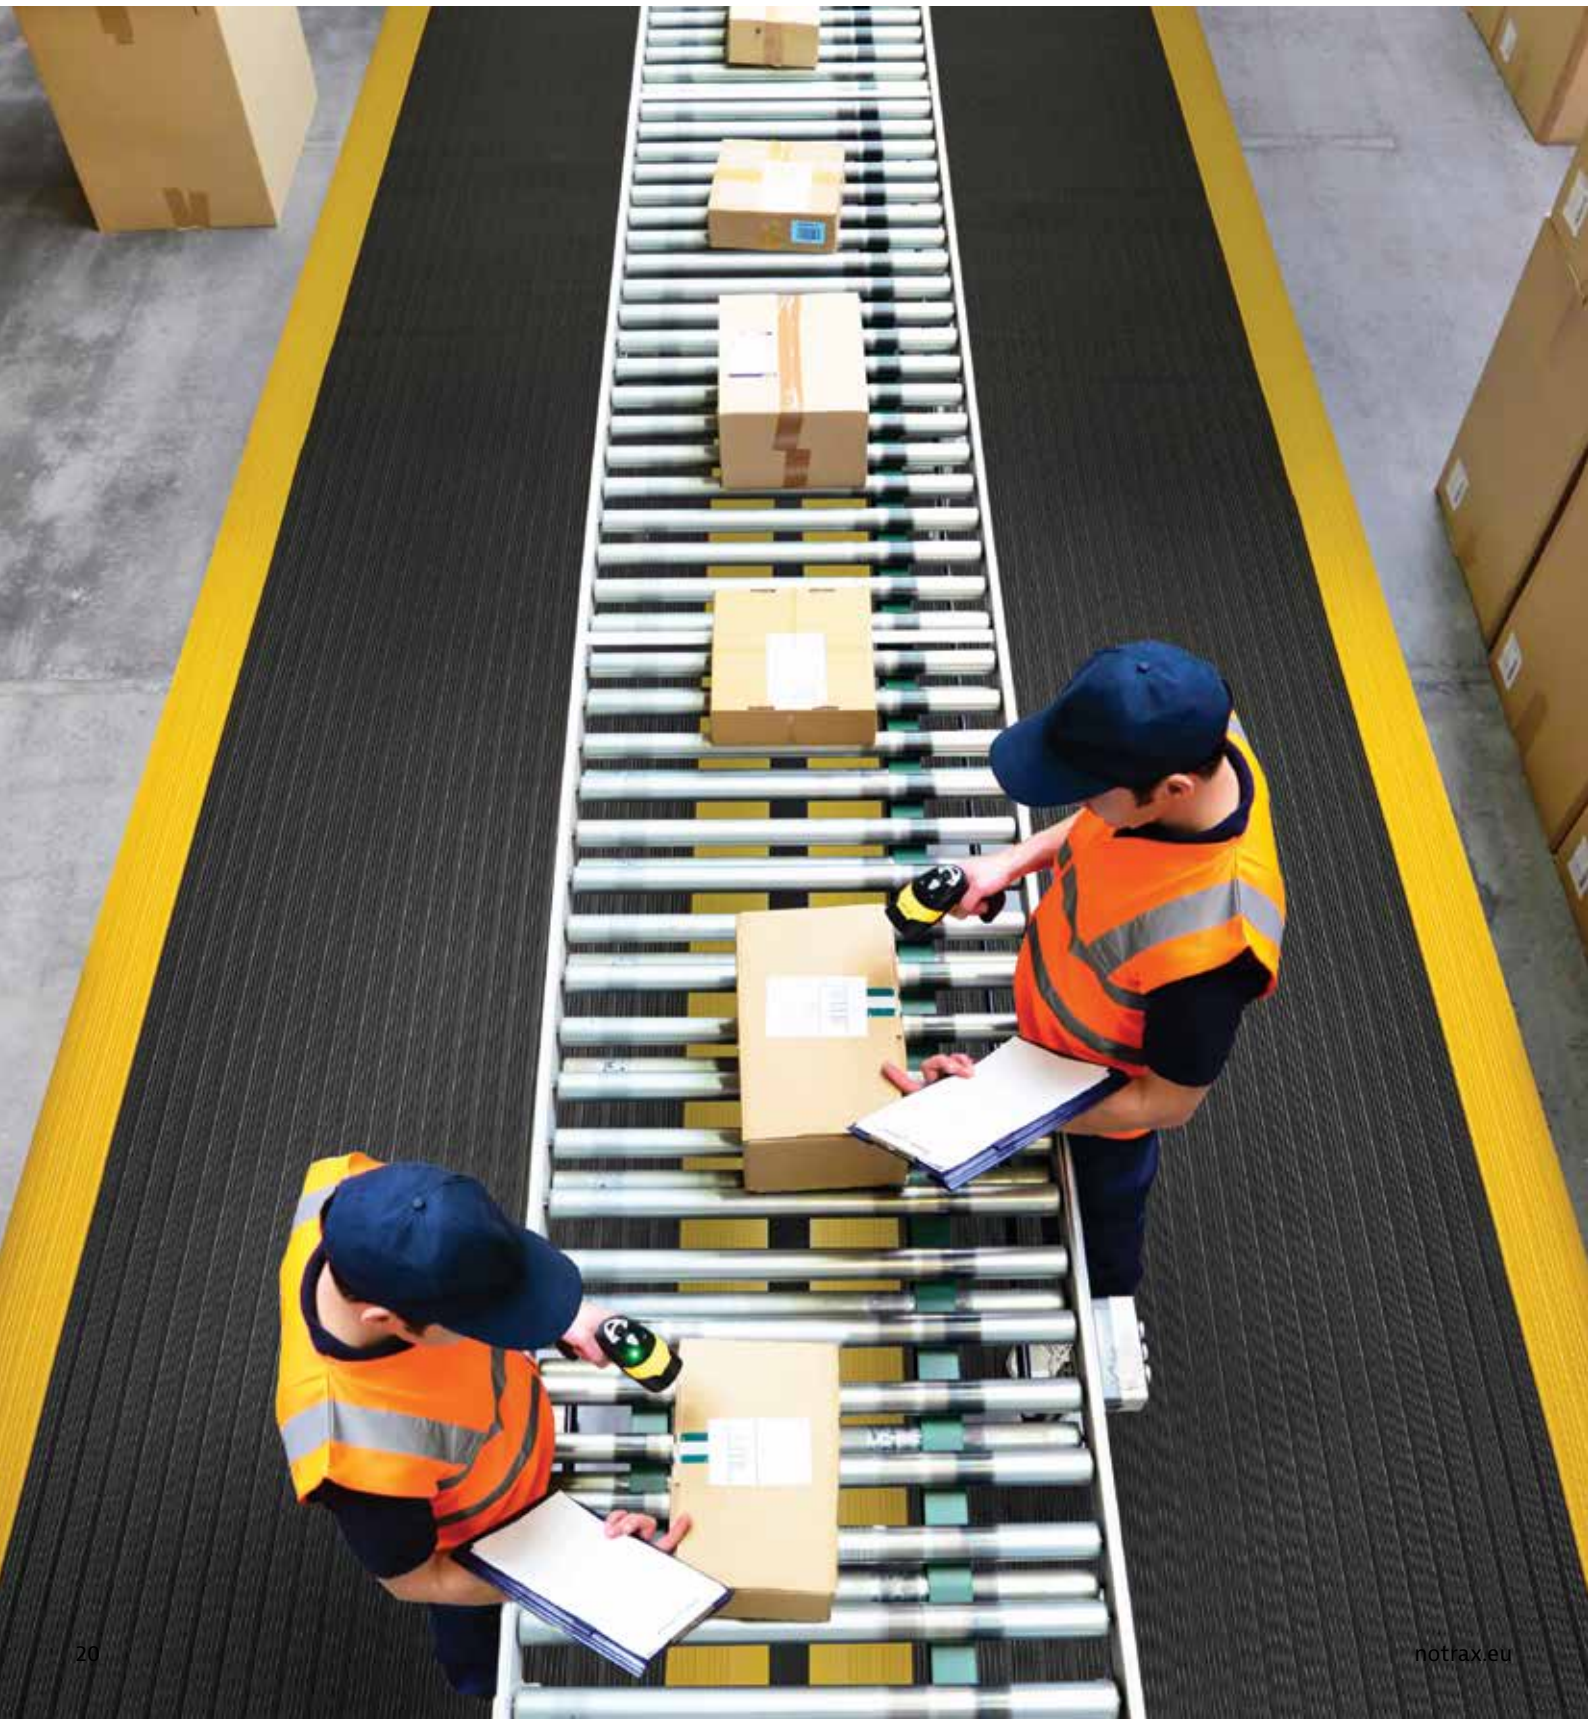

408 Airug® Plus

Recommended uses:

- Medium duty - dry areas
- Ribbed pattern enhances traction
- Colours: Black/yellow, Black, Grey
- Weight: 2.8 kg per m²



Stock sizes:


- 60 cm x 91 cm
- 91 cm x 150 cm

Full rolls 18.3 m:

- 60 cm, 91 cm, and 122 cm widths

Custom lengths:

- 60 cm, 91 cm, and 122 cm widths



409 Sof-Tred Plus™

Recommended uses:

- Medium duty - dry areas
- Pebble pattern provides non-directional traction and is easy to clean
- Colours: Black/yellow, Black, Grey
- Weight: 2.8 kg per m²



Stock sizes:


- 60 cm x 91 cm
- 91 cm x 150 cm

Full rolls 18.3 m:

- 60 cm, 91 cm, and 122 cm widths

Custom lengths:

- 60 cm, 91 cm, and 122 cm widths



410 Airug®

Recommended uses:

- Light duty - dry areas
- Ribbed pattern enhances traction
- Colours: Black/yellow, Black, Grey
- Weight: 2.3 kg per m²



Stock sizes:


- 60 cm x 91 cm
- 91 cm x 150 cm

Full rolls 18.3 m:

- 60 cm, 91 cm, and 122 cm widths

Custom lengths:

- 60 cm, 91 cm, and 122 cm widths



411 Sof-Tred™

Recommended uses:

- Light duty - dry areas
- Pebble pattern provides non-directional traction and is easy to clean
- Colours: Black/yellow, Black, Grey,
- Weight: 2.3 kg per m²



Stock sizes:


- 60 cm x 91 cm
- 91 cm x 150 cm

Full rolls 18.3 m:

- 60 cm, 91 cm, and 122 cm widths

Custom lengths:

- 60 cm, 91 cm, and 122 cm widths



Dry Oily Areas - Heavy Duty Nitrile Mats

649 Safety Stance Solid™

High quality anti-fatigue matting for heavy duty industrial environments. Unique DiamondGrid™ surface pattern ensures sure footing to prevent slips and falls while channels drain incidental oil exposure.

Closed design ensures easy cleaning and prevents small items from falling under the mat. Remarkable worker comfort derived from a 20-mm thick resilient worker platform.



649 Safety Stance Solid™

Made of a 100% nitrile rubber compound designed to withstand industrial oils and harsh chemicals. Suited for multi-shift operations. Standard size mats for individual workstations are loose lay and require no installation. Highly visible nitrile rubber orange coloured borders included on 3 sides for added safety to prevent tripping. Non-shifting. Free of silicone therefore safe for vehicle painting facilities.



Recommended uses:

- Heavy duty - dry oily industrial environments. For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms.

Specifications:

- Heavy duty 100% nitrile rubber compound
- Resistant to industrial oils and harsh chemicals
- Orange coloured borders included on 3 sides comply with OSHA Code 1910-144
- Slip resistance R10 according to DIN51130 and BG-rule BGR181
- Overall thickness: 20 mm
- Weight: 15 kg per m²

Colours:

- Black

Stock sizes with 3 orange borders:


- 66 cm x 102 cm
- 97 cm x 163 cm
- 97 cm x 315 cm

Custom sizes:

- 649 Safety Stance Solid™ Custom is available on demand in custom sizes and configurations

Accessories:

- 551 MD Ramp System™ Nitrile 5 cm wide male attachable safety ramps, orange
- 552 MD-X Ramp System™ Nitrile 15 cm male attachable safety ramps, orange

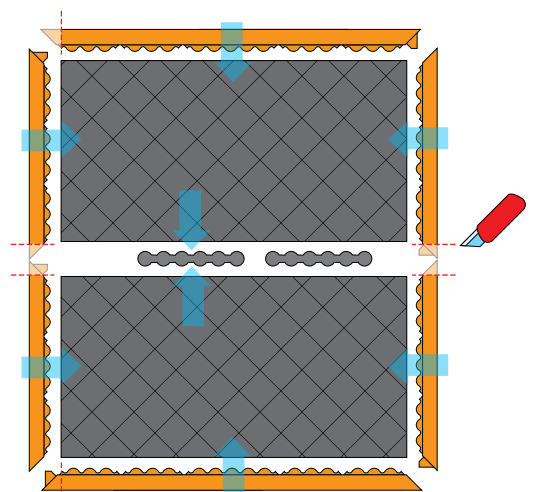

649 Safety Stance Solid™ Custom
Custom sizes. Calculated on square meter basis.

Dry Areas - Heavy Duty Industrial **Diamond Flex™ Series**

High quality anti-fatigue individual workstation mat for heavy duty industrial environments. Standard size mats for individual workstations are loose lay and require no installation.

The 18.4 mm thick platform elevates and insulates the worker from the hard ground while the bulleted domes underneath allow the mat to bend and “flex” with every movement.



Recommended uses:

- Heavy duty - dry industrial environments in manufacturing plants, production and assembly lines

Stock sizes with black or yellow borders:

- 101 cm x 160 cm with 4 bevels
- 96 cm x 160 cm with 3 bevels

Specifications:

- Heavy duty rubber compound
- Overall thickness: 18.4 mm
- Weight: 14.6 kg per mat
- Slip resistance rating R10 according to DIN 51130
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

546 Diamond Flex™

Specifications:

- 100% natural rubber compound
- General purpose applications



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST

547 Diamond Flex™ Nitrile

Specifications:

- 100% nitrile rubber compound
- Resistant to most industrial oils



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST

548 Diamond Flex™ ESD

Specifications:

- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$
- Optional grounding cord



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST

646 Diamond Flex Nitrile FR

Specifications:

- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas



Wear resistance

Slip resistance

Anti-fatigue



GOOD BETTER BEST

Dry Areas - Heavy Duty Modular Rubber Mats

Cushion Ease Solid™ Series

Heavy duty rubber tiles of 91 cm x 91 cm can be easily assembled for coverage of large areas or individual workstations, wall-to-wall or as islands.

Ergonomic benefit derived from a 19-mm thick worker platform with a closed anti-slip pebble structure surface for maximum anti-fatigue comfort in dry industrial environments.

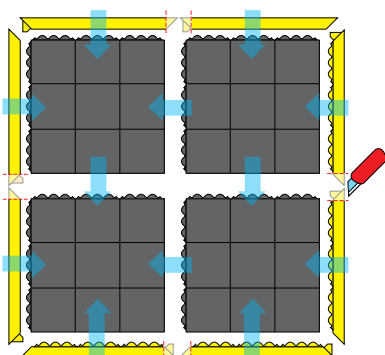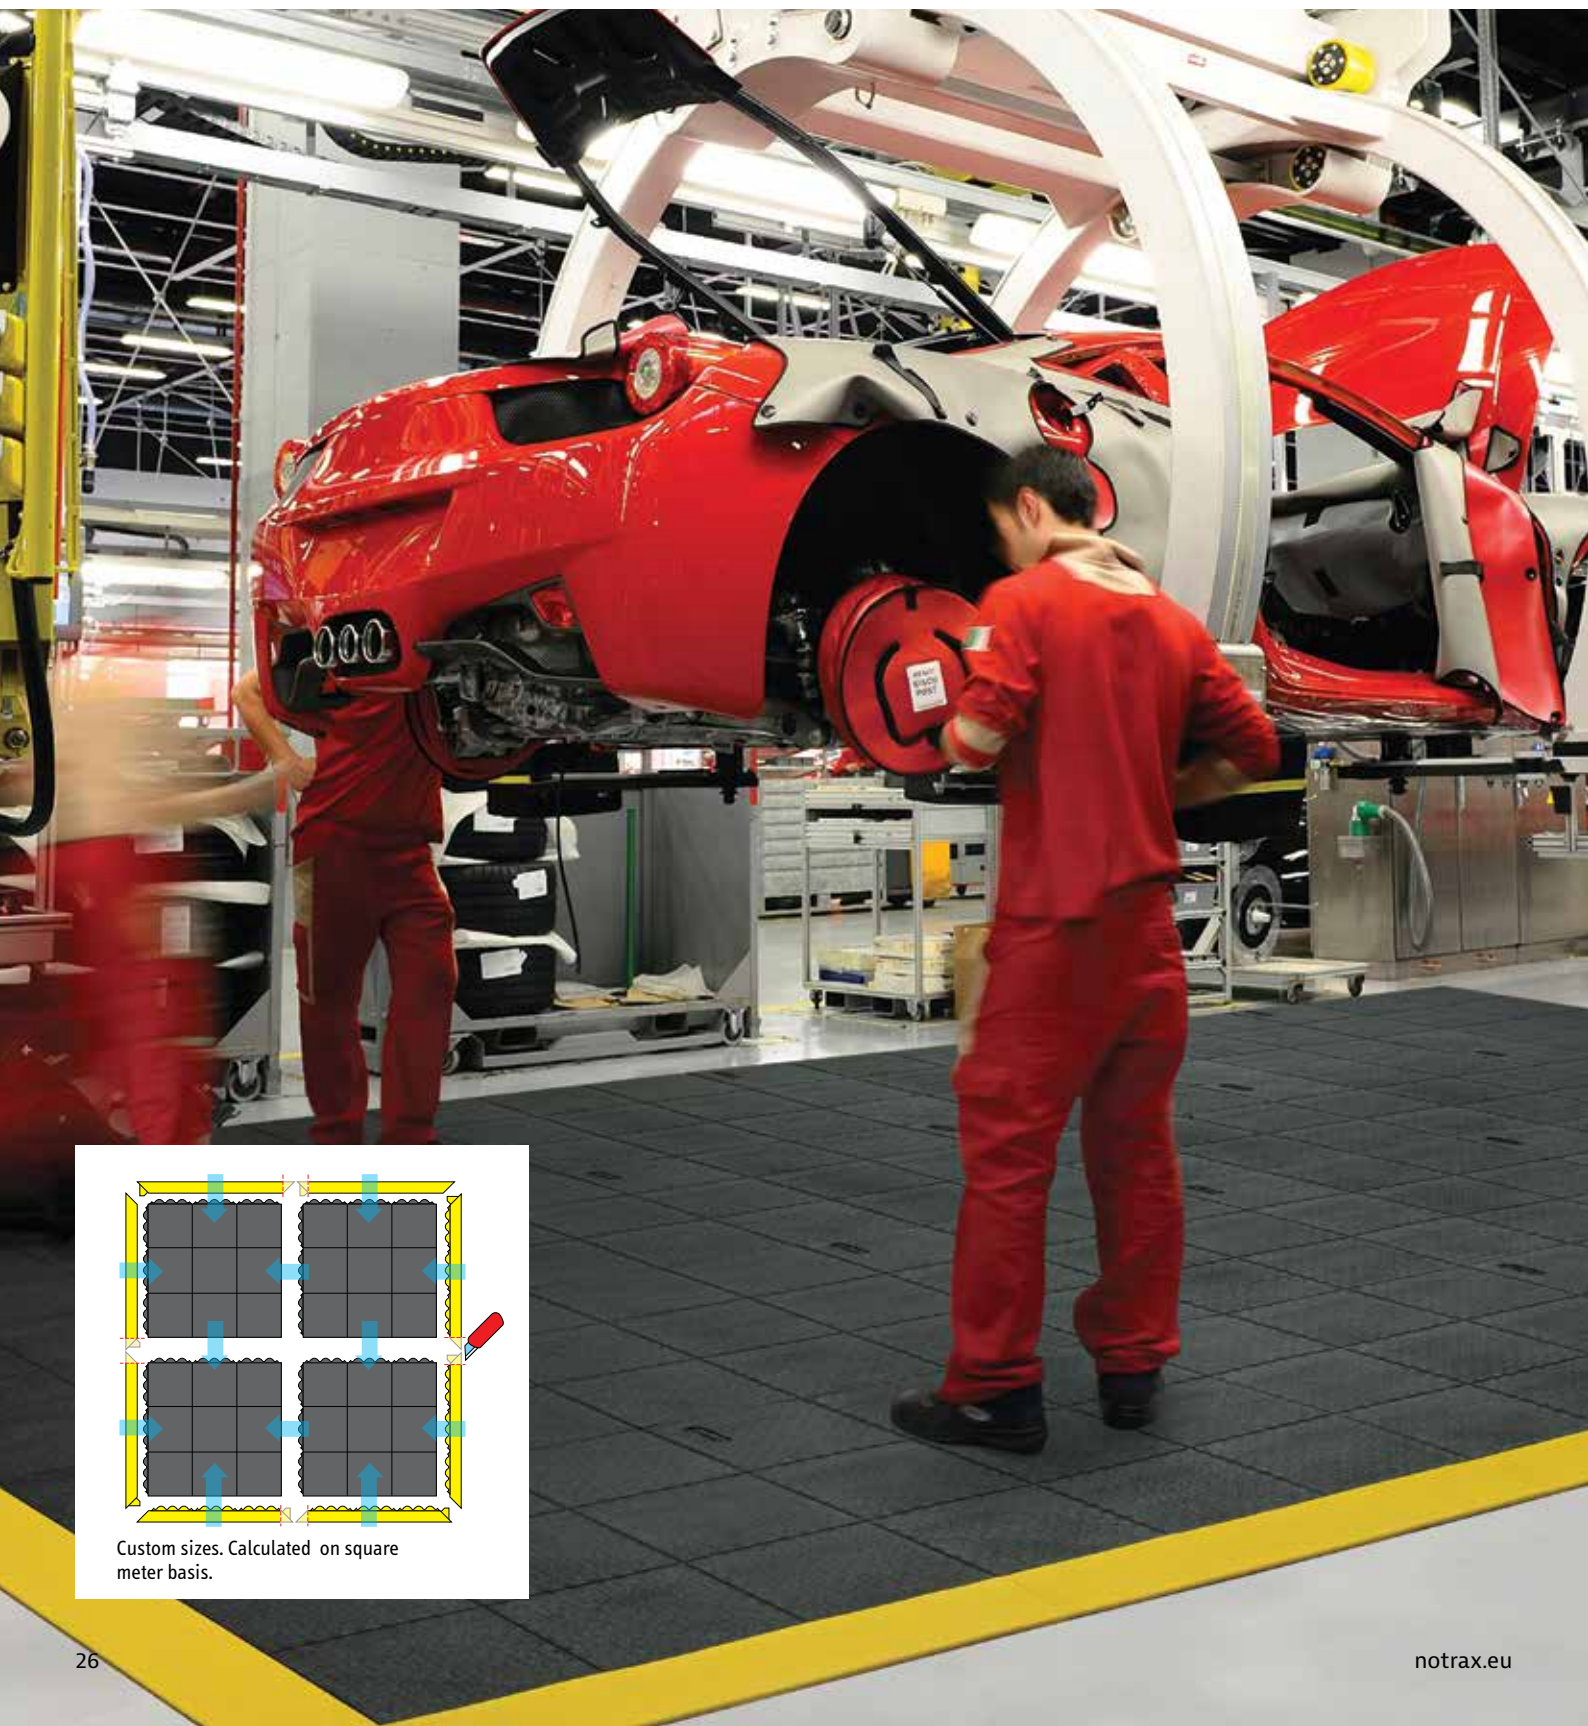

Custom sizes. Calculated on square meter basis.

Recommended uses:

- Heavy duty - dry industrial environments in manufacturing plants, production and assembly lines

Specifications:

- Heavy duty rubber compound
- Overall thickness: 19 mm
- Weight: 12.7 kg per mat

Accessories:

- 551 MD Ramp System™ Nitrile, male and female attachable bevels 91 x 5 cm, black or yellow
- 552 MD-X Ramp System™ Nitrile, male and female attachable bevels 91 x 15 cm, black or yellow - broader size to allow easier access for wheelchairs and light carts

556 Cushion Ease Solid™

- 100% natural rubber compound
- General purpose applications



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



656S Cushion Ease Solid™ Nitrile

- 100% nitrile rubber compound
- Resistant to most industrial oils



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



656SFR Cushion Ease Solid™ Nitrile FR

- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



558 Cushion Ease Solid™ ESD

- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$
- Optional grounding cord



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



661 Cushion Ease Solid™ ESD Nitrile FR

- Static dissipative 100% nitrile rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



856SFR Cushion Ease Solid™ Nitrile GSII® FR

- 100% nitrile rubber compound.
- With abrasive Grip Step® coating for extra adherence in extremely slippery areas




Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST SUPERIOR

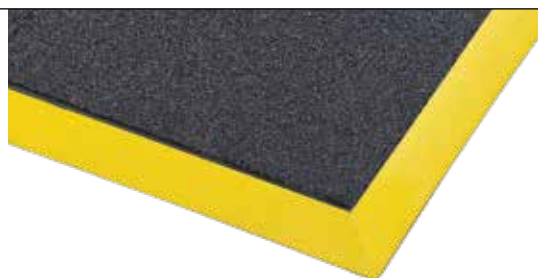


Dry Areas - Heavy Duty Modular Rubber Mats

De-Flex™ Series

Extremely comfortable heavy duty anti-fatigue matting system with popular diamond plate traction surface that can be easily assembled for coverage of large areas or individual workstation mats.

These 45 cm x 45 cm modular rubber tiles are designed with a universal double-locking system on all sides to ensure an extra strong yet seamless connection for fast installation.

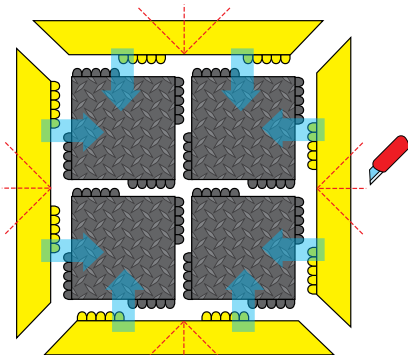

Custom sizes. Calculated on square meter basis.

Recommended uses:

- Heavy duty - dry industrial areas

Specifications:

- Heavy duty rubber compound
- Overall thickness: 19 mm
- Weight: 3,3 kg per mat
- Slip resistance rating R10 according to DIN 51130
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Stock sizes:


- 45 cm x 45 cm

Accessories:

- Nitrile attachable bevel 91 cm x 15 cm, black or yellow

570 De-Flex™

- 100% natural rubber compound
- General purpose applications

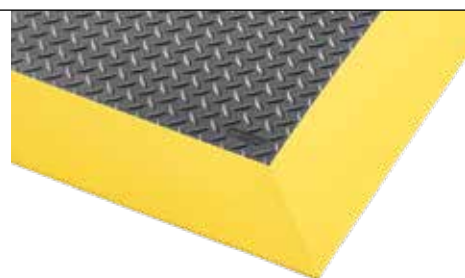**572 De-Flex™ Nitrile**

- 100% nitrile rubber compound
- Resistant to most industrial oils

**573 De-Flex™ ESD**


- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$
- Optional grounding cord

**574 De-Flex™ ESD Nitrile FR**

- Static dissipative 100% nitrile rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$
- Optional grounding cord
- Fire classification Bfl-S1 tested according to EN 13501-1

**575 De-Flex™ Nitrile FR**

- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding area


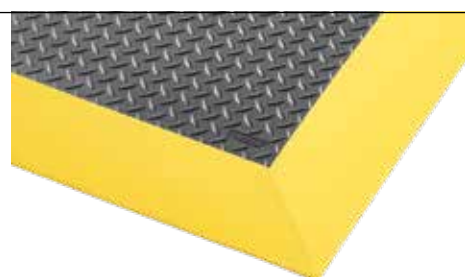


Dry Areas - Heavy Duty Modular Rubber Mats

Skywalker HD™ Series

Heavy duty rubber tiles of 91 cm x 91 cm can be easily assembled for coverage of large areas or individual workstations.

Ergonomic benefit derived from a 13-mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

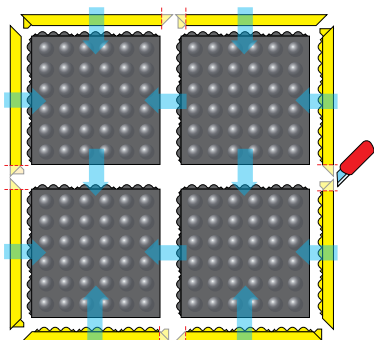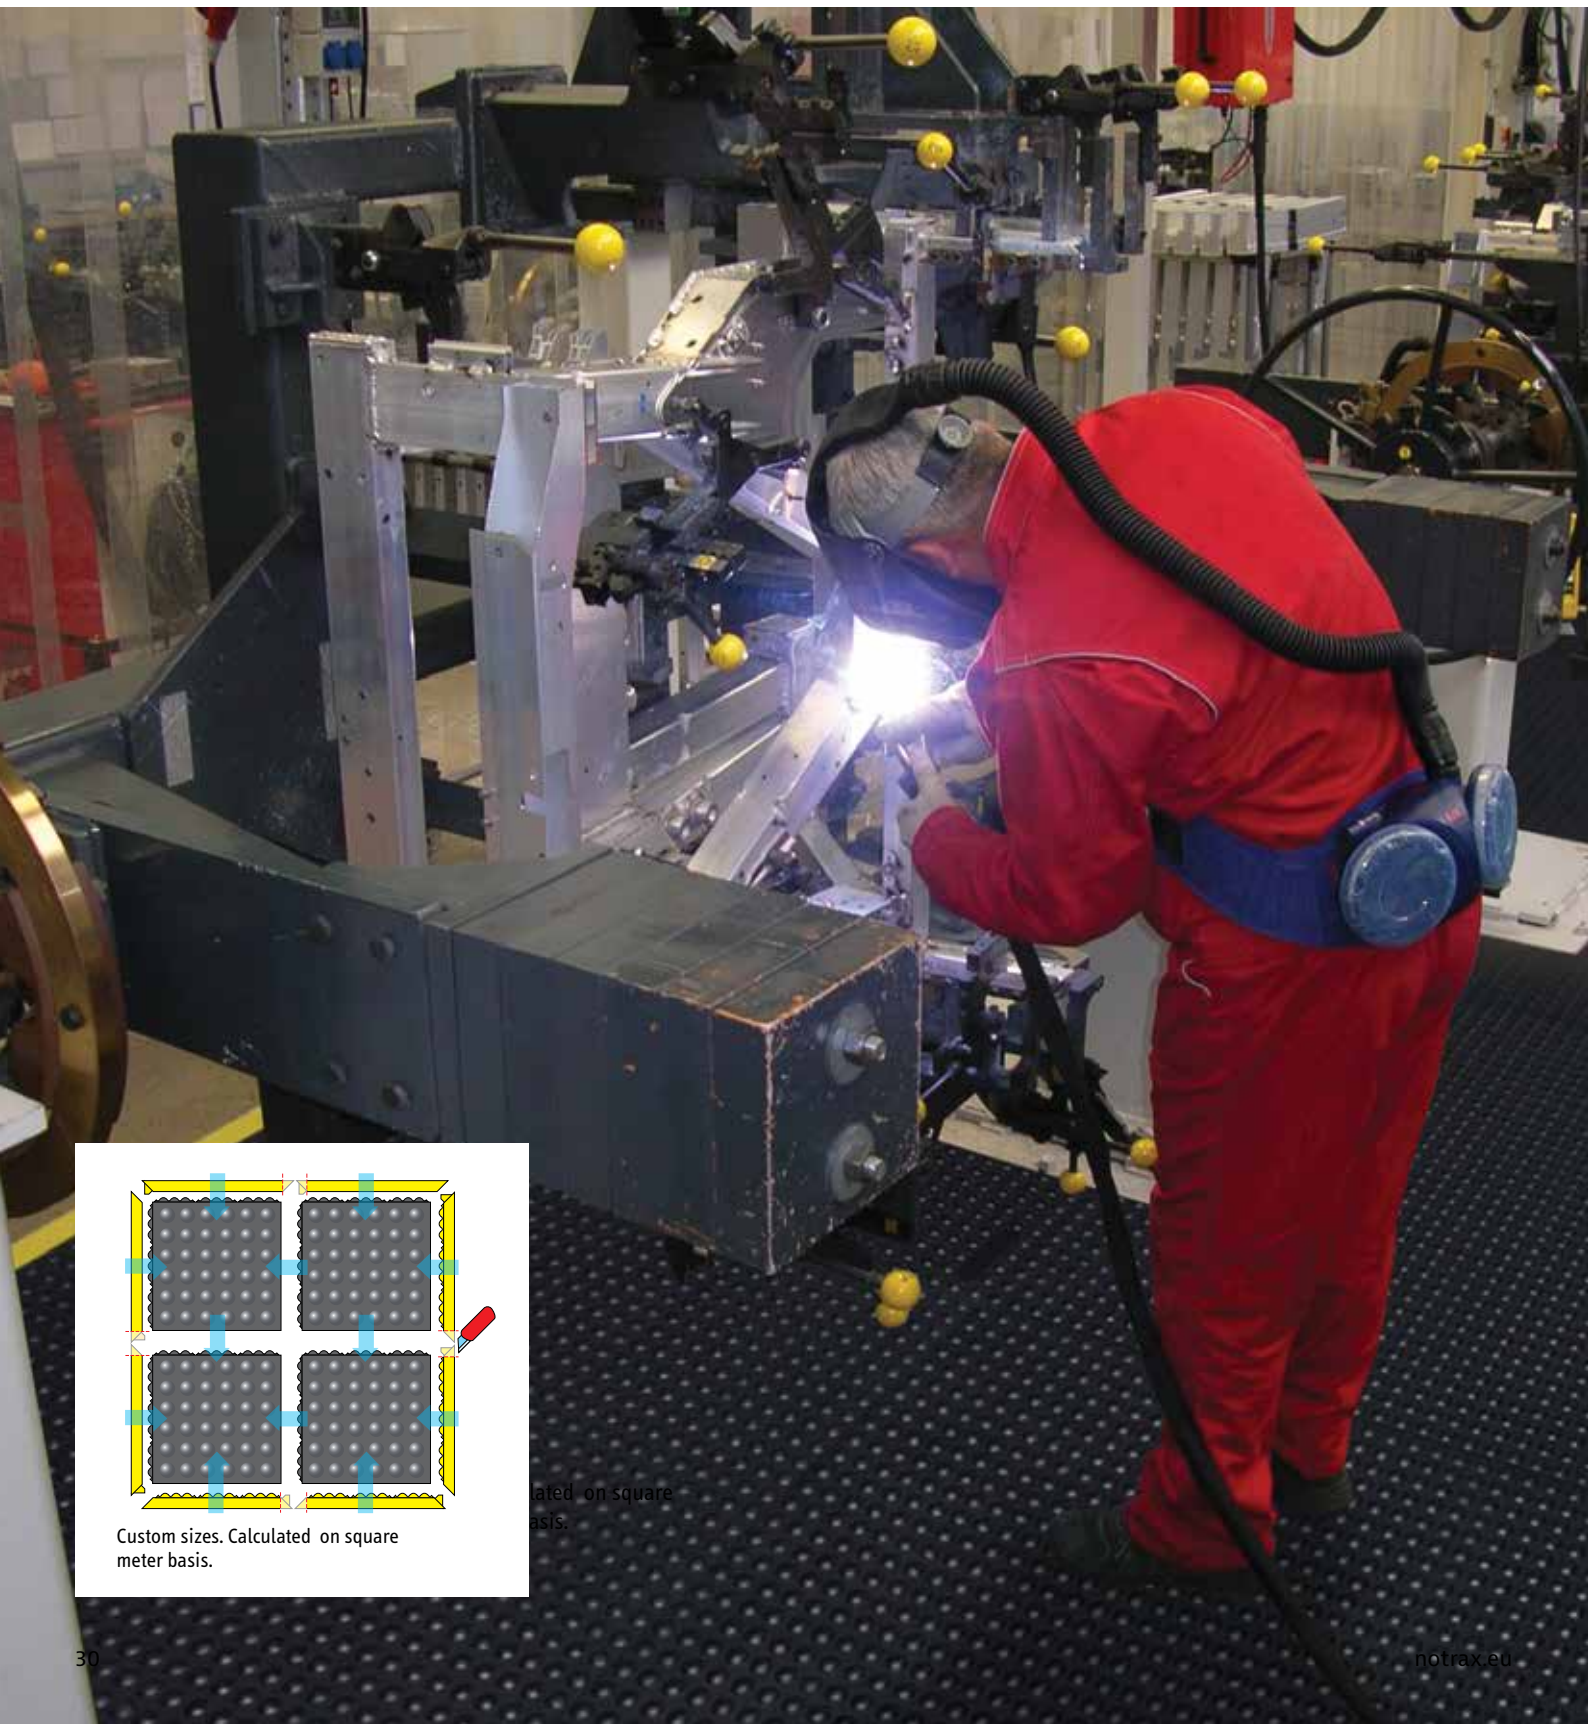

Custom sizes. Calculated on square meter basis.

ated on square
asis.

Recommended uses:

- Heavy duty - dry industrial environments. For placement in manufacturing plants, production lines, assembly lines, metal working, fabrication, individual workstations and custom work platforms.

Specifications:

- Heavy duty rubber compound
- Overall thickness: 13 mm
- Weight: 10 kg per mat
- Slip resistance rating R9 according to DIN 51130

Stock sizes:

- 91 cm x 91 cm

Accessories:

- 461 SkywalkerHD™ Safety Ramp Nitrile, attachable bevel 91 cm x 5 cm, black or yellow
- 434 Skywalker HD i-Curve™ ESD Nitrile FR 91 cm – 45 degree inner curve
- 444 Skywalker HD o-Curve™ ESD Nitrile FR 91 cm – 22.5 degree outer curve
- 469 SkywalkerHD Safety Line™ Nitrile for marking borders, walkways, zones and safety barriers.

460 Skywalker HD™

- 100% natural rubber compound
- General purpose applications



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



462 Skywalker HD™ Nitrile

- 100% nitrile rubber compound
- Resistant to most industrial oils



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



463 Skywalker HD™ ESD

- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



464 Skywalker HD™ ESD Nitrile FR

- Static dissipative 100% nitrile rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



465 Skywalker HD™ Nitrile FR

- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



Dry Areas - Heavy Duty Modular Rubber Mats

Skywalker HD™ Accessories

The Skywalker HD™ accessories maintain the same feel as the Skywalker HD™ mats with an ergonomic bubble pattern and matching rubber compounds.

This seamless integration allows for unlimited configuration possibilities.



469 Skywalker HD Safety Line™

Recommended uses:

- Heavy duty - dry areas

Specifications:


- Heavy duty rubber compound
- Overall thickness: 13 mm
- Slip resistance rating R9 according to DIN 51130
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals
- Yellow safety line for marking borders, walkways, zones and safety barriers
- 100% nitrile rubber compound
- Resistant to most industrial oils

Colours:

- Yellow

Stock sizes:

- 10 cm x 91 cm

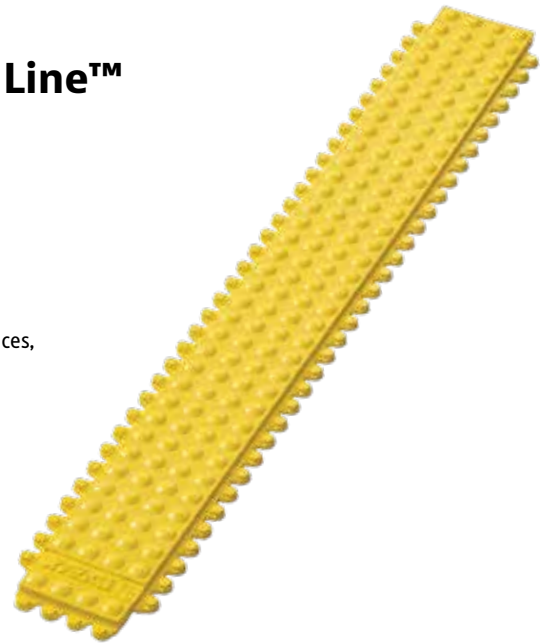


434 Skywalker HD i-Curve™ ESD Nitrile FR

Specifications:

- 91 cm – 45 degree inner curve
- 431 Skywalker HD™ i-Curve Safety Ramp Nitrile male attachable bevels, available in black or yellow
- Weight: 4.3 kg per mat
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$
- Static dissipative nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas

Colours:

- Black

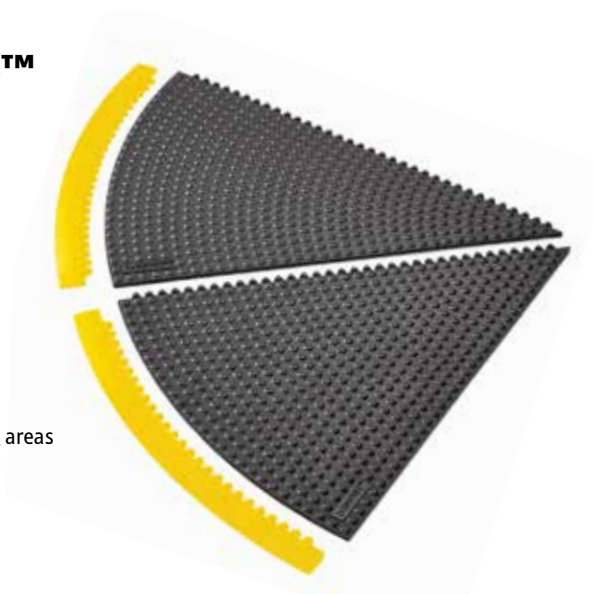


444 Skywalker HD o-Curve™ ESD Nitrile FR

Specifications:

- 91 cm – 22.5 degree outer curve
- 441 Skywalker HD™ o-Curve Safety Ramp Nitrile male attachable bevels, available in black or yellow
- Weight: 6.4 kg per mat
- Meets IEC61340-4-1 (category DIF), measured resistance $R_g 10^6 - 10^9 \Omega$, $R_p 10^6 - 10^9 \Omega$
- Static dissipative nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas

Colours:

- Black

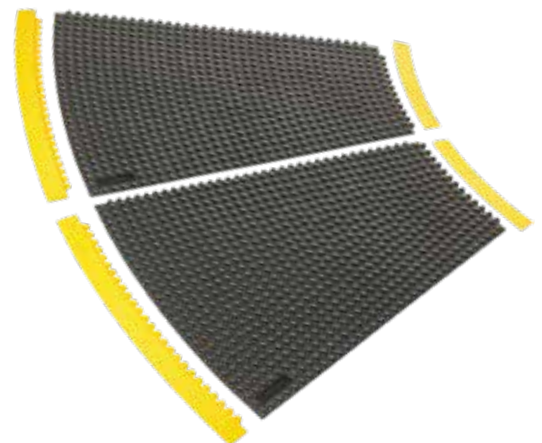

Dry Areas - Medium Duty Rubber Foam Mats

425 Posture Mat Series

Exceptionally soft and comfortable anti-fatigue mats for standing workers in primarily static positions with limited lateral movement making it ideal for sit-stand desks and individual standing workstations.

The rebound of the foam results in an energizing bounce effect that stimulates automatic balance checks to improve posture and constant micro movements to maintain blood flow.



426 Posture Mat™

The ideal anti-fatigue mat for adjustable desks that combines style and comfort primarily for stationary positions making it ideal for sit-stand desks and standing workstations. A built-in handle makes it easy to carry or hang up when not in use.

Recommended uses:

- Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, service counters, cashiers

Specifications:

- PVC top surface attached to a microcellular vinyl base with a crumb rubber backing
- Attractive textured pattern fits well in office environments
- Overall thickness: 18 mm
- Weight: 3.3 kg per m²
- Bevelled edges on all four sides to minimize risk of tripping

Colours:

- Grey

Stock sizes :

- 52 cm x 70 cm
- 51 cm x 99 cm



425 Posture Mat Classic™

Made from a durable closed cell foam that is reputed for its ultimate comfort and longevity properties, the naturally resilient material moulds to the foot to spread weight and reduce pressure points from the hard floor underneath. All four sides have bevelled edges to minimize tripping hazards. Loose lay with no installation required.

Recommended uses:

- Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, wait stations, service counters, cashiers

Specifications:

- Durable closed cell foam blend rubberized sponge
- Textured basket weave surface for grip
- Overall thickness: 19 mm
- Weight: 5.8 kg per m²
- Bevelled edges on all four sides to minimize risk of tripping

Colours:

- Black

Stock sizes:

- 51 cm x 61 cm
- 61 cm x 182 cm
- 91 cm x 102 cm
- 91 cm x 152 cm



Dry Areas - Medium Duty Polyurethane Mats

Skywalker® PUR Series

High quality polyurethane foam anti-fatigue mats are reputed for their ultimate comfort in stationary standing positions. Its key characteristic of high thermal insulation performance is owed to a uniform closed cell structure

wherein gas remains trapped. Integral skin adds to the compression force deflection properties (>120 according to ASTM 3574C), provides resistance to wear and is non-porous.



450 Skywalker® PUR

Specifications:

- High quality polyurethane foam for general purpose applications
- Ergonomic bubble surface provides sure footing and fatigue relief
- Overall thickness: 14 mm
- Weight: 4.8 kg per m²
- Slip resistance rating R11

Colours:

- Grey

Stock sizes:

- 65 cm x 95 cm
- 65 cm x 140 cm
- 65 cm x 185 cm
- 95 cm x 125 cm
- 95 cm x 155 cm
- 95 cm x 185 cm



451 Skywalker® II PUR

Specifications:

- High quality polyurethane foam for general purpose applications
- Pebble surface for sure footing and allows freedom of movement
- Overall thickness: 14 mm
- Weight: 4.8 kg per m²
- Slip resistance rating R11

Colours:

- Grey

Stock sizes:

- 65 cm x 90 cm
- 65 cm x 135 cm
- 65 cm x 175 cm
- 90 cm x 125 cm
- 90 cm x 155 cm
- 90 cm x 185 cm



452 Skywalker® PUR ESD

Specifications:

- Static dissipative polyurethane foam
- Ergonomic bubble surface provides traction and fatigue relief
- Overall thickness: 14 mm
- Weight: 4.8 kg per m²
- Slip resistance rating R11
- Meets IEC61340-4-1 (category DIF) measured resistance
- Rg 10⁶ - 10⁹ Ω, Rp 10⁶ - 10⁹ Ω

Colours:

- Black

Stock sizes:

- 65 cm x 95 cm
- 65 cm x 140 cm
- 65 cm x 185 cm
- 95 cm x 125 cm
- 95 cm x 155 cm
- 95 cm x 185 cm



453 Skywalker® II PUR ESD

Specifications:

- Static dissipative polyurethane foam
- Pebble surface for sure footing and allows freedom of movement
- Overall thickness: 14 mm
- Weight: 4.8 kg per m²
- Slip resistance rating R11
- Meets IEC61340-4-1 (category DIF) measured resistance
- Rg 10⁶ - 10⁹ Ω, Rp 10⁶ - 10⁹ Ω

Colours:

- Black

Stock sizes:

- 65 cm x 90 cm
- 65 cm x 135 cm
- 65 cm x 175 cm
- 90 cm x 125 cm
- 90 cm x 155 cm
- 90 cm x 185 cm



Dry Areas - Medium Duty Rubber Standalone Mats

Skystep™ Series

Ergonomically and economically engineered, the Skystep™ utilizes the power of air. Skystep™ is designed to suction to the ground to prevent the mat from shifting while trapping air in its chambers. These air pockets combined with the resiliency of the rubber create an ultimate cushioning effect

while keeping the mat lightweight. Integrated bevelled edges on all four sides to prevent tripping on the mat. Loose lay with no installation required. Slip resistance rating R9 according to DIN 51130 and BG-rule BGR181.



455 Skystep™

Specifications:

- 100% natural rubber compound
- General purpose applications
- Overall thickness: 13 mm
- Weight: 10 kg per m²
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals.

Colours:

- Black

Stock sizes:

- 60 cm x 90 cm
- 90 cm x 120 cm
- 90 cm x 150 cm



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



456 Skystep™ Nitrile

Specifications:

- 100% nitrile rubber compound
- Resistant to most industrial oils
- Overall thickness: 13 mm
- Weight: 10 kg per m²
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals.

Colours:

- Black

Stock sizes:

- 60 cm x 90 cm
- 90 cm x 120 cm
- 90 cm x 150 cm



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



457 Skystep™ ESD

Specifications:

- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF) measured resistance Rg 10⁶ - 10⁹ Ω, Rp 10⁶ - 10⁹ Ω
- Optional grounding cord
- Overall thickness: 13 mm
- Weight: 10 kg per m²
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals.

Colours:

- Black

Stock sizes:

- 60 cm x 90 cm
- 90 cm x 120 cm
- 90 cm x 150 cm



Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST



Dry Areas - Medium Duty Rubber Standalone Mats

526G Sani-Flex™

Specially designed for the lab industry, Sani-Flex™ anti-fatigue matting provides the optimum combination of comfort, anti-slip surface, quality and durability, as well as oil/grease and chemical resistance.

Its smooth surface and rounded off edges make it easy to clean. Small sizes are perfect for stationary working areas as well as making the mats light and easy to handle.

